## **TECHNICAL INFORMATION**



# **AW6308-1EW Achilles**





## **Application Descriptions:**

- Wall Mounted, Fixed
- Interior or Exterior Areas
- Residential and Commercial, Retail and Hospitality, Educational and Medical Buildings, Aged Care Facilities: Building Wall Perimeters, Balconies and Columns Applications

<b>Product Name</b>	ACHILLES
Description	Exterior, High Powered, Square, Vandal Resistant, Up and Down, Wall Mounted, LED Luminaire with Integral Driver
Material	Die Cast Corrosion Resistant Aluminium Body, Powder coated for Outdoor Use, Clear Tempered Glass Diffuser, Silicone Rubber Gasket
Dimensions	Height: 150mm; Width: 100mm; Projection: 128mm
LED Details	2x9W, Cree COB, 3000K or 4000K available, 36° Beam, 1150lms
Driver	Integral LED Driver
IP Rating	IP65
IK Rating	IK08
Installation	Wall Mounted

## **TECHNICAL INFORMATION**



# **Order Code:**


# AW6308-1EW-(Colour Finish)-(Temperature)-(Beam Angle)-(Dimming)

Example: AW6308-1EW-BK-3K-ND-36°


## **Options:**

Colour Finish	Temperature	Beam Angle	Dimming
BK (Black)	3K (3000K)	<b>36</b> °	ND (Non-Dim)
GR (Grey)	4K (4000K)		

#### **Dimensions Line Diagram:**

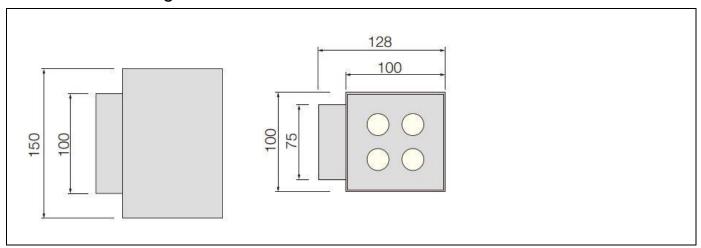

#### **Photometrics:**

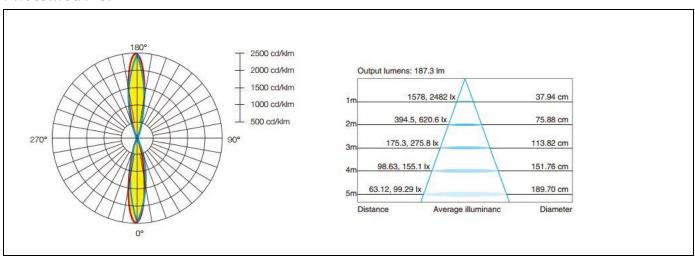





# **Product Application Photo:**

