TECHNICAL INFORMATION



AW684RD Onyx 160





Application Descriptions:

- Recessed, Fixed
- Interior and Exterior Locations, High Ceiling and Low Glare Applications
- High Ceiling Entry Lobbies, Shopping Centres, Sport Centres, Stadiums, Concert Halls, Airports

Product Name	ONYX 160
Description	High Powered, Anti Dazzle Glare Control Reflector, IP65 Water and Dust Protected, Fixed, Recessed LED Downlight
Material	Die Cast Aluminium Trim and Body, Patented Semi- Frosted PC Lens Diffuser, Removable Anti-Glare Reflector, Internal Parabolic Reflector, Water Proof Capping and Silicon Rubber Ring
Dimensions	Diameter: 225mm; Height: 195mm; Cut Out: 200mm
LED Details	160W Bridgelux or Luminus COB LED, 3000K, 4000K,5000K,6000K available, CRI: 85, Beam Angle: 18°, 30°, 50°, 16600lm
Driver	4100mA LED Driver
IP Rating	IP65
IK Rating	IK04
Installation	Recessed

TECHNICAL INFORMATION




Order Code:

AW684-(Colour Finish)-(Temperature)-(CRI)-(Beam Angle)-(Dimming)

Example: AW684-WH-3K-C8-18°-ND

Options:

Colour Finish	Temperature	CRI	Beam Angle	Dimming
WH (White)	3K (3000K)	C8(80)	18°	ND (Non-Dim)
BK (Black)	4K (4000K)	C9(90)	30 °	PH (Phase)
GR (Grey)	5K (5000K)		50 °	11 (1-10V)
	6K (6000K)			DD (DALI)











Dimensions Line Diagram:

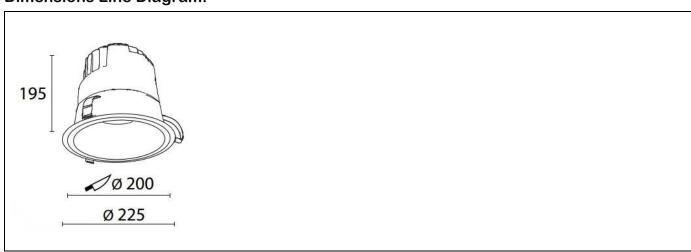

TECHNICAL INFORMATION



Photometrics:

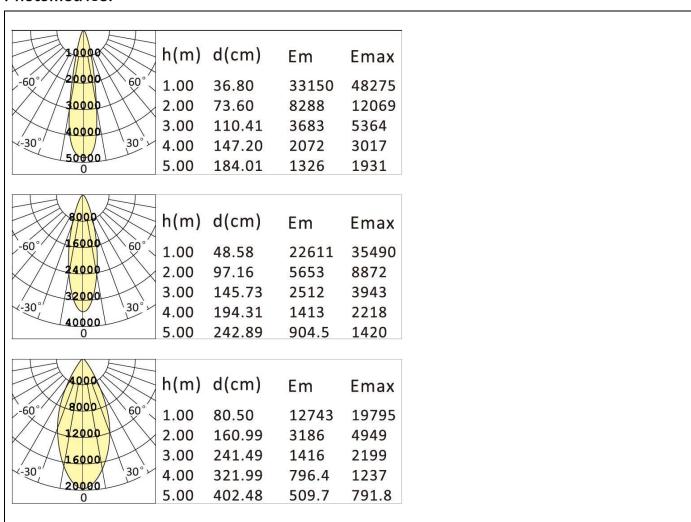

Product Application Photo:

