TECHNICAL INFORMATION



AW412IU Octavia 6





Application Descriptions:

- Inground, Fixed
- Exterior Areas, Landscaping
- Inground Pathway Lighting, Building Perimeters, Foliage/Tree Uplighter Sculpture/Column Uplighter

Product Name	OCTAVIA 6
Description	Stainless Steel, Low Height, Circular Integral Driver, Inground LED Uplighter
Material	Stainless Steel 304 Grade Faceplate, Aluminium Body, Clear Strengthened Tempered Glass Diffuser Rated for 20kN Impact Force, Stainless Steel Screws
Dimensions	Diameter: 120mm; Height: 206mm; Cut Out: 118mm
LED Details	6W Cree XP SMD, 3000K available, Beam Angle: 33° 300lm
Driver	Integral Driver
IP Rating	IP67
IK Rating	IK10
Installation	Inground

TECHNICAL INFORMATION



Order Code:


AW412IU-(Colour Finish)-(Temperature)-(Beam Angle)-(Dimming)

Example: AW412IU-ST-3K-33°-ND


Options:

Colour Finish	Temperature	Beam Angle	Dimming
ST (S. Steel)	3K (3000K)	33°	ND (Non-Dim)

Dimensions Line Diagram:

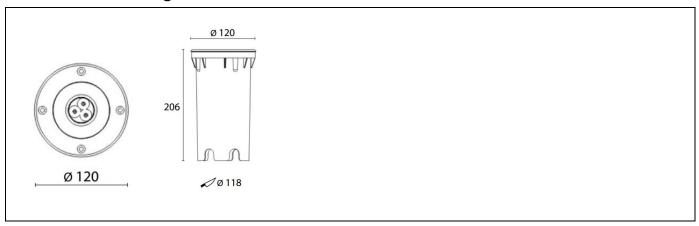

Photometrics:

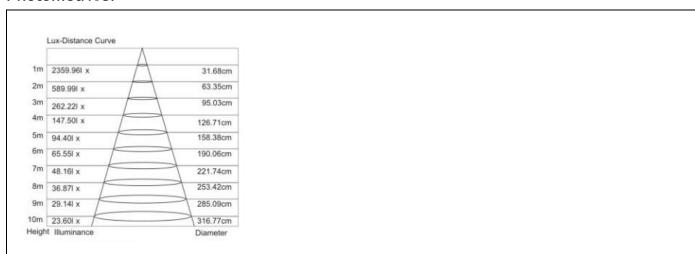





Product Application Photo:



