TECHNICAL INFORMATION



AW36RD Ecofire 10 IP





Application Descriptions:

- Recessed, Adjustable
- Internal and External Areas, General Ceiling Heights, Wet Areas
- Residential Living, Bathrooms, Aged Care Facilities, Awnings and Balconies, Retail and Hospitality Applications

Product Name	ECOFIRE 10 IP			
Description	Low Profile, Anti Glare, High CRI, Patented Heat Sink for Rapid Heat Dissipation, Fixed, Recessed,			
	LED Downlight.			
Material	Aluminium Trim and Body, Two Step Parabolic			
	Reflector, Clear Glass Diffuser, Custom Engineered			
	Heat Sink, Aluminium Recessing Side Blades			
Dimensions	Diameter: 82mm; Height: 59mm; Cut Out: 70mm			
LED Details	10W Sharp Zenigata, 3000K or 4000K available,			
	CRI: 80/91, Beam Angle: 36°/60°, 950lm			
Driver	250mA LED Driver			
IP Rating	IP44			
IK Rating	IK04			
Installation	Recessed			

TECHNICAL INFORMATION



81

47

Order Code:


AW36RD-(Colour Finish)-(Temperature)-(CRI)-(Beam Angle)-(Dimming)

Example: AW36RD-WH-3K-C8-60°-ND


Options:

Colour Finish	Temperature	CRI	Beam Angle	Dimming
WH (White)	3K (3000K)	C8 (82)	36°	ND (Non-Dim)
BK (Black)	4K (4000K)	C9 (91)	60°	PH (Phase)
				11 (1-10V)
				DD (DALI)

Dimensions Line Diagram:

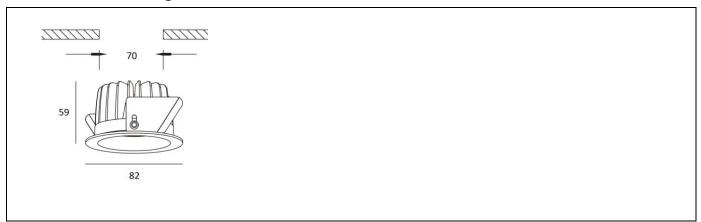

Photometrics:

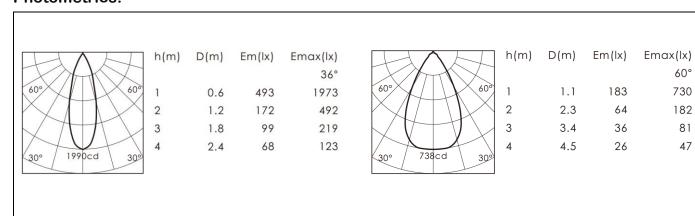





Product Application:

