#### **TECHNICAL INFORMATION**



# **AW3301RS Center Single**







### **Application Descriptions:**

- Recessed, Adjustable
- Internal Areas
- Residential Living, Commercial Offices, Retail and Hospitality, Shopping Malls, Showrooms and Galleries, Educational and Medical Building Applications

<b>Product Name</b>	CENTER SINGLE		
Description	Single Head, Square Trim, Adjustable Gimbal,		
	Recessed LED Downlight with Remote LED Driver		
Material	High Grade Aluminium Alloy Inner Rings, Cold Rolled		
	Sheet Metal Body, Frosted PC Lens Diffuser		
Dimensions	Diameter: 191 x 191mm; Height: 118mm; Cut Out: 169 x 165mm		
<b>LED Details</b>	20W Sharp Zenigata, 3000K or 4000K available,		
	CRI: 80, Beam Angle: 36°, 2000lm		
Driver	500mA LED Driver		
IP Rating	IP20		
IK Rating	IK05		
Installation	Recessed		

### **TECHNICAL INFORMATION**



## **Order Code:**


#### AW3301RS-(Colour Finish)-(Temperature)-(Beam Angle)-(Dimming)

Example: AW3301RS-WH-3K-36°-ND


# **Options:**

Colour Finish	Temperature	Beam Angle	Dimming
WH (White)	3K (3000K)	36°	ND (Non-Dim)
BK (Black)	4K (4000K)		PH (Phase)
GR (Grey)			11 (1-10V)
			DD (DALI)

#### **Dimensions Line Diagram:**

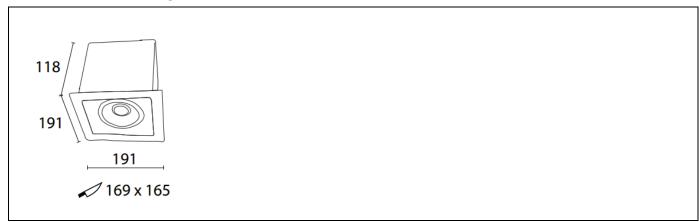

#### **Photometrics:**

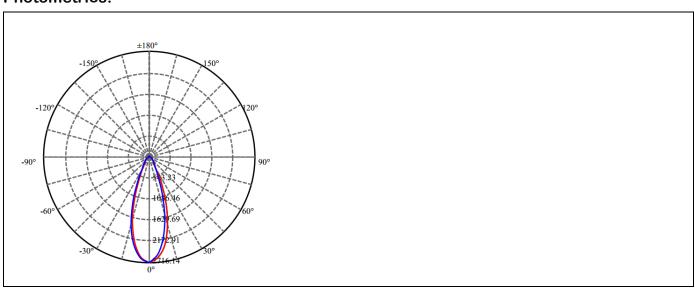





## **Product Application Photo:**



