

## TECHNICAL INFORMATION

### AW6317-2EW Sovereign Down



Wall Mounted  
Fixed

#### Application Descriptions:

- Wall Mounted, Fixed
- Interior or Exterior Areas, Corrosion Resistant Applications
- Building Wall Perimeter, Stairs, Hallways, Entry Ways, Columns, Corridors and Pathway Applications

|              |   |
|--------------|---|
| Product Name | <b>SOVEREIGN DOWN</b>   |
| Description  | Exterior, Stainless Steel, Cylindrical, One Directional, Wall Mounted, LED Luminaire with Integral Driver |
| Material     | Grade 304 Stainless Steel Body, Clear Tempered Glass Diffuser, Silicone Rubber Gasket                     |
| Dimensions   | Diameter: 108mm; Height: 200mm; Projection: 120mm   |
| LED Details  | 10W, Cree COB, 3000K, 45° Beam, CRI: 80, 890lms   |
| Driver       | Integral Non-Dimmable Driver  |
| IP Rating    | IP65  |
| IK Rating    | IK06  |
| Installation | Wall Mounted  |

We reserve the right to make technical changes.

Should you have any enquiries, please consult an Actwell representative. Email: [sales@actwelllighting.com.au](mailto:sales@actwelllighting.com.au)  
34 Mary Parade | Rydalmere NSW 2116 | Australia | T +61 2 9638 3333 | [www.actwelllighting.com](http://www.actwelllighting.com)

## TECHNICAL INFORMATION

### Order Code:


**AW6317-2EW-(Colour Finish)-(Temperature)-(Beam Angle)-(Dimming)**

**Example: AW6317-2EW-SS-3K-ND -45°**


### Options:

| Colour Finish                  | Temperature       | Beam Angle | Dimming             |
|--------------------------------|-------------------|------------|---------------------|
| <b>SS</b><br>(Stainless Steel) | <b>3K</b> (3000K) | <b>45°</b> | <b>ND</b> (Non-Dim) |

### Dimensions Line Diagram:



### Photometrics:

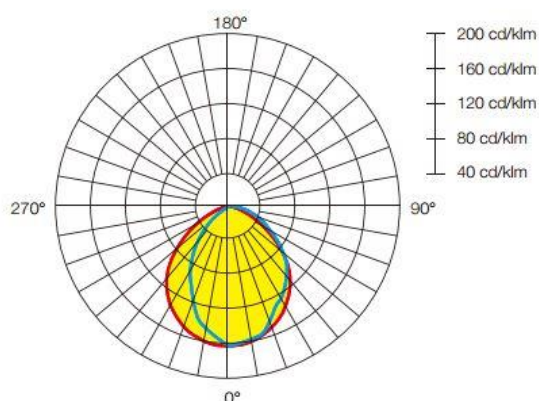

Output lumens: 115.7 lm

| Distance | Average illuminance | Diameter   |
|----------|---------------------|------------|
| 1m       | 26.87, 68.95 lx     | 230.24 cm  |
| 2m       | 6.718, 17.24 lx     | 460.49 cm  |
| 3m       | 2.986, 7.661 lx     | 690.73 cm  |
| 4m       | 1.679, 4.309 lx     | 920.97 cm  |
| 5m       | 1.075, 2.758 lx     | 1151.22 cm |

We reserve the right to make technical changes.

Should you have any enquiries, please consult an Actwell representative. Email: [sales@actwelllighting.com.au](mailto:sales@actwelllighting.com.au)

34 Mary Parade | Rydalmere NSW 2116 | Australia | T +61 2 9638 3333 | [www.actwelllighting.com](http://www.actwelllighting.com)

## TECHNICAL INFORMATION

### Product Application Photo:

