TECHNICAL INFORMATION



AW9803SD Oasis R30





Application Descriptions:

- Surface Mounted, Fixed
- Internal Areas, Wide and Even Light Coverage, Low Ceiling Applications
- Residential Living, Commercial Offices, Education and Medical Buildings, Retail and Hospitality: Bedrooms and Living Rooms, Corridors, Reception and Work Desks, Concrete Ceiling Areas, Kitchens, Lift Entries Applications

Product Name	Oasis R30
Description	Low Profile, Circular, Wide Distribution, Ceiling Mounted LED Luminaire Utilising Patented Thin Film Transistor Technology
Material	Die Cast Aluminium Trim and Body, Powdercoated
	Matt Finish, Aluminium Heat Sink, Patented Thin Film
	Transistor, PMMA Opal Diffuser
Dimensions	Diameter: 300mm; Height: 39mm
LED Details	30W, Epistar SMD3528, 3000K or 4000K available, 110° Beam, 2400lms
Driver	Integral LED Driver
IP Rating	IP40
IK Rating	IK05
Installation	Surface Mounted

TECHNICAL INFORMATION



Order Code:


AW9803SD-(Colour Finish)-(Temperature)-(Beam Angle)-(Dimming)

Example: AW9803SD-WH-3K-110°-ND


Options:

Colour	Temperature	Beam Angle	Dimming
WH (WH)	3K (3000K)	110°	ND (Non-Dim)
BK (Black)	4K (4000K)		PH (Phase)

Dimensions Line Diagram:

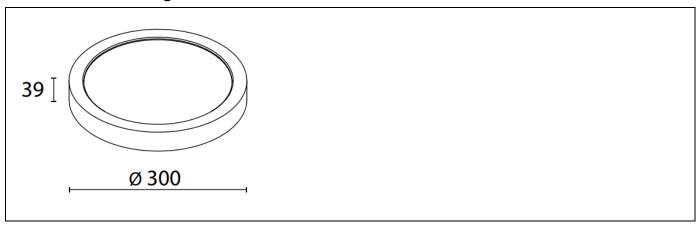

Photometrics:

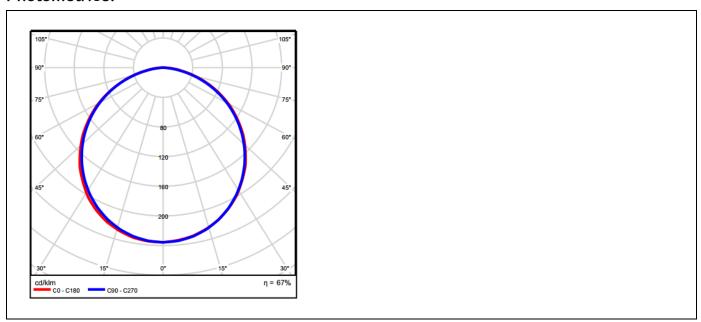





Product Application Photos:

