

TECHNICAL INFORMATION

AW6270RD Vision 20



Recessed
Adjustable

Application Descriptions:

- Recessed, Adjustable
- Internal Areas, Spotlighting Applications
- Commercial Offices, Retail and Hospitality, Foyer Entries, Educational and Medical Buildings, Residential Living, Showroom and Gallery Applications

Product Name	VISION 20
Description	High Adjustment, Anti Glare Deep Baffle, Tilttable Eye, Contemporary Internal Black Baffle, Adjustable, Recessed LED Luminaire
Material	Powder Coated Die Cast Aluminium Trim and Body, Clear Tempered Glass, Parabolic Reflector, PMMA Black Baffle Trim, Slewing Slide Mechanism
Dimensions	Diameter: 150mm; Height: 130mm; Cut Out: 137mm
LED Details	20W Sharp COB, 3000K or 4000K available, CRI: 85, Beam Angle: 36°or 60°, 1800lm
Driver	500mA LED Driver
IP Rating	IP20
IK Rating	IK03
Installation	Recessed

We reserve the right to make technical changes.

Should you have any enquiries, please consult an Actwell representative. Email: sales@actwelllighting.com.au
34 Mary Parade | Rydalmere NSW 2116 | Australia | T +61 2 9638 3333 | www.actwelllighting.com

TECHNICAL INFORMATION

Order Code:


AW6270RD-(Colour Finish)-(Temperature)-(Beam Angle)-(Dimming)

Example: AW6270RD-WH-3K-36°-ND



Options:

Colour Finish	Temperature	Beam Angle	Dimming
WH (White)	3K (3000K)	36°	ND (Non-Dim)
BK (Black)	4K (4000K)	60°	PH (Phase)
			11 (1-10V)
			DD (DALI)

Dimensions Line Diagram:



Photometrics:

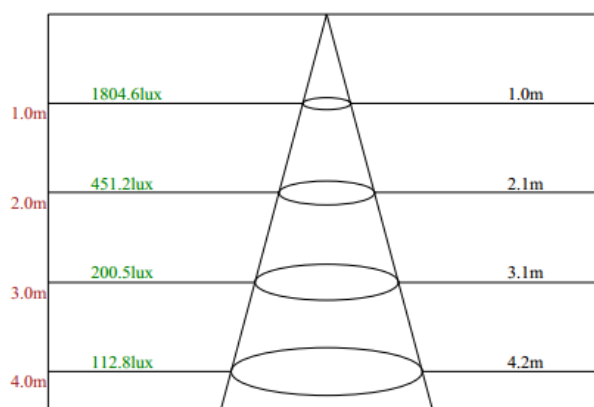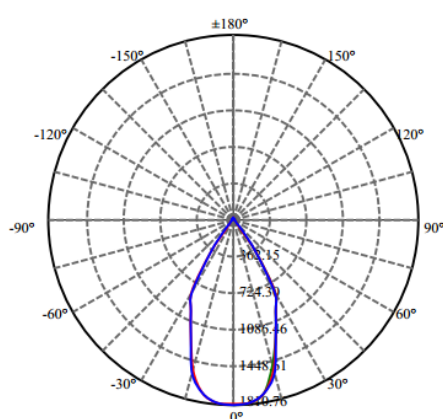

We reserve the right to make technical changes.

Should you have any enquiries, please consult an Actwell representative. Email: sales@actwelllighting.com.au

34 Mary Parade | Rydalmere NSW 2116 | Australia | T +61 2 9638 3333 | www.actwelllighting.com

TECHNICAL INFORMATION

Product Application Photos:



We reserve the right to make technical changes.

Should you have any enquiries, please consult an Actwell representative. Email: sales@actwelllighting.com.au
34 Mary Parade | Rydalmere NSW 2116 | Australia | T +61 2 9638 3333 | www.actwelllighting.com