

TECHNICAL INFORMATION

AW5528RS Ava SS



Recessed
Adjustable

Application Descriptions:

- Recessed, Adjustable
- Interior Areas, Downlight Series in Single, Double and Triple Head Options
- Commercial Offices, Board Rooms, Medical Clinics, Showrooms, Retail and Hospitality Applications

Product Name	AVA SS
Description	Twin Head, Square Trim, Adjustable Gimbal, Recessed LED Downlight with Remote LED Driver
Material	Powdercoated Die Cast Aluminium Trim, Frosted Glass Diffuser
Dimensions	Diameter: 190 x 350mm; Height: 158mm; Cut Out: 316 x 158mm
LED Details	2x20W Bridgelux Vero 10, 3000K or 4000K available, CRI: 80, Beam Angle: 90°, 3800lm
Driver	2x700mA LED Driver
IP Rating	IP20
IK Rating	IK03
Installation	Recessed

We reserve the right to make technical changes.

Should you have any enquiries, please consult an Actwell representative. Email: sales@actwelllighting.com.au
34 Mary Parade | Rydalmere NSW 2116 | Australia | T +61 2 9638 3333 | www.actwelllighting.com

TECHNICAL INFORMATION

Order Code:


AW5528RS-(Colour Finish)-(Temperature)-(Beam Angle)-(Dimming)

Example: AW5528RS-WH-3K-90°-ND

Options:

Colour Finish	Temperature	Beam Angle	Dimming
WH (White)	3K (3000K)	90°	ND (Non-Dim)
	4K (4000K)		PH (Phase)
			11 (1-10V)
			DD (DALI)

Dimensions Line Diagram:

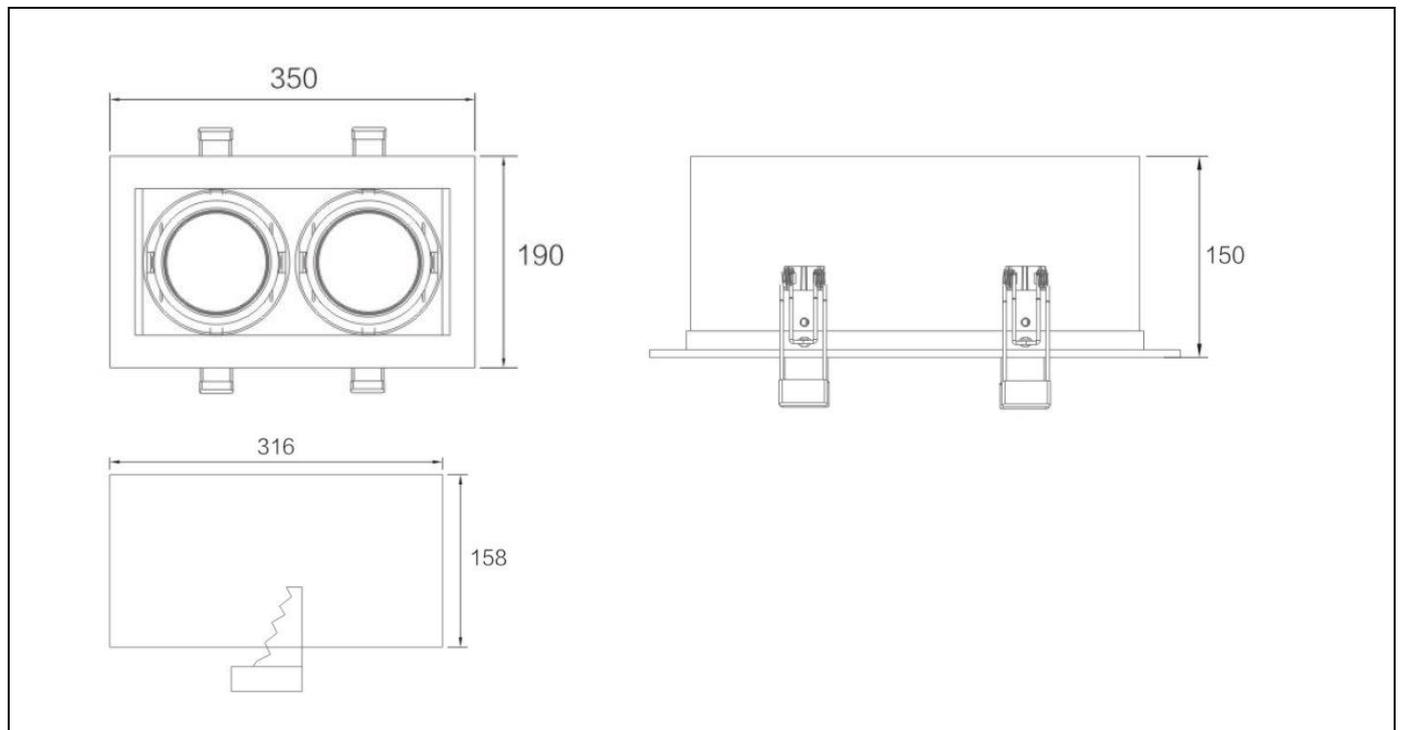

We reserve the right to make technical changes.

Should you have any enquiries, please consult an Actwell representative. Email: sales@actwelllighting.com.au

34 Mary Parade | Rydalmere NSW 2116 | Australia | T +61 2 9638 3333 | www.actwelllighting.com