### **TECHNICAL INFORMATION**



## **AW6308-2EW Achilles Down**





### **Application Descriptions:**

- Wall Mounted, Fixed
- Interior or Exterior Areas
- Residential and Commercial, Retail and Hospitality, Educational and Medical Buildings, Aged Care Facilities: Building Wall Perimeters, Balconies and Columns Applications

<b>Product Name</b>	ACHILLES DOWN		
Description	Exterior, High Powered, Square, Vandal Resistant, One Directional, Wall Mounted, LED Luminaire with		
	Integral Driver		
Material	Die Cast Corrosion Resistant Aluminium Body,		
	Powder coated for Outdoor Use, Clear Tempered Glass		
	Diffuser, Silicone Rubber Gasket		
Dimensions	Height: 150mm; Width: 100mm; Projection: 128mm		
LED Details	9W, Cree COB, 3000K or 4000K available, 36° Beam, 580lms		
Driver	Integral LED Driver		
IP Rating	IP65		
IK Rating	IK08		
Installation	Wall Mounted		

## **TECHNICAL INFORMATION**



## **Order Code:**


## AW6308-2EW-(Colour Finish)-(Temperature)-(Beam Angle)-(Dimming)

Example: AW6308-2EW-BK-3K-ND-36°


# **Options:**

Colour Finish	Temperature	Beam Angle	Dimming
BK (Black)	3K (3000K)	<b>36</b> °	ND (Non-Dim)
GR (Grey)	4K (4000K)		

#### **Dimensions Line Diagram:**

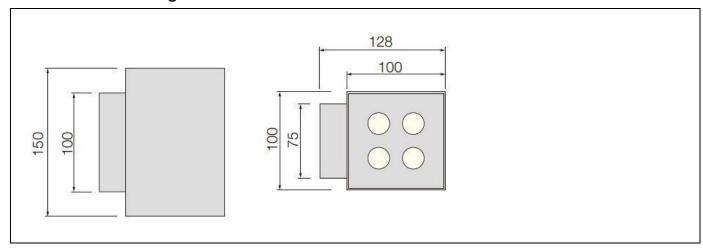

#### **Photometrics:**

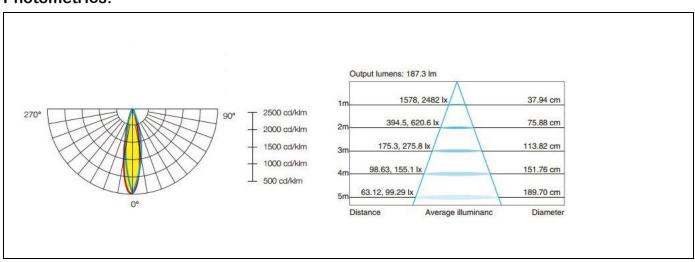





# **Product Application Photo:**

