

TECHNICAL INFORMATION

AW9800SD Oasis R8



Surface Mounted
Fixed

Application Descriptions:

- Surface Mounted, Fixed
- Internal Areas, Wide and Even Light Coverage, Low Ceiling Applications
- Residential Living: Small Storage Spaces, Walk in Wardrobes, Walk in Pantries and Corridor Applications

Product Name	OASIS R8
Description	Low Profile, Circular, Wide Distribution, Ceiling Mounted LED Luminaire Utilising Patented Thin Film Transistor Technology
Material	Die Cast Aluminium Trim and Body, Powdercoated Matt Finish, Aluminium Heat Sink, Patented Thin Film Transistor, PMMA Opal Diffuser
Dimensions	Diameter: 117mm; Height: 39mm
LED Details	8W, Epistar SMD3528, 3000K or 4000K available, Beam Angle: 110°, 540lms
Driver	Integral LED Driver
IP Rating	IP40
IK Rating	IK05
Installation	Surface Mounted

We reserve the right to make technical changes.

Should you have any enquiries, please consult an Actwell representative. Email: sales@actwelllighting.com.au
34 Mary Parade | Rydalmere NSW 2116 | Australia | T +61 2 9638 3333 | www.actwelllighting.com

TECHNICAL INFORMATION

Order Code:


AW9800SD-(Colour Finish)-(Temperature)-(Beam Angle)-(Dimming)

Example: AW9800SD-WH-3K-110°-ND


Options:

Colour Finish	Temperature	Beam Angle	Dimming
WH (WH)	3K (3000K)	110°	ND (Non-Dim)
BK (Black)	4K (4000K)		PH (Phase)

Dimensions Line Diagram:



Photometrics:

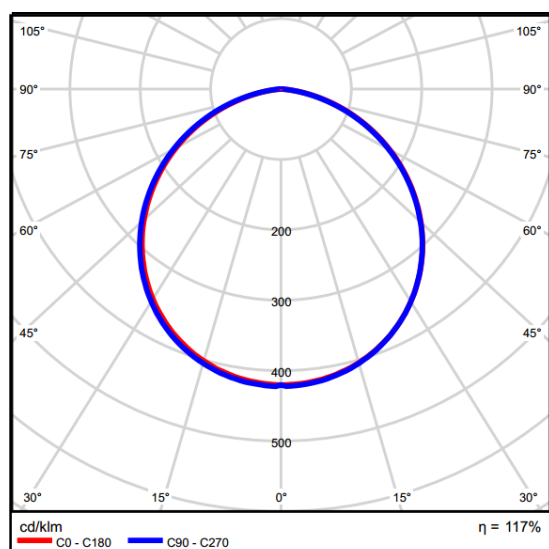

We reserve the right to make technical changes.

Should you have any enquiries, please consult an Actwell representative. Email: sales@actwelllighting.com.au

34 Mary Parade | Rydalmere NSW 2116 | Australia | T +61 2 9638 3333 | www.actwelllighting.com