

TECHNICAL INFORMATION

AW1515MTTC Edge



Surface Mounted
Fixed

Application Descriptions:

- Surface Mounted, Fixed
- Internal Areas, Linear and Ambient Lighting Applications, 45° degree angled
- Residential Living, Retail and Hospitality, Aged Care Facilities: Kitchen and Bathroom Cabinetry, Retail Displays, Ceiling Soffits, Under Table or Seating Lighting, Wall Indenting, Linear Backlighting, Step Treads Linear Lighting Applications

Product Name	EDGE
Description	Cornice Application Linear Extrusion, Utilising SMD LED Tape, Frosted Acrylic Diffuser, 24V, Available with Aluminium Mounting Clips, Custom Cut to Length
Material	Extruded Pure Aluminium Channel, Frosted Acrylic Diffuser, Aluminium Mounting Clips
Dimensions	Length: 17 x 17 mm; With Mounting Clip: 19 x 19
LED Details	10W/m Epistar SMD5050, 3000K or 4000K available, Beam Angle: 120°, 1350lm/m
Driver	Remote Driver
IP Rating	IP44
IK Rating	IK05
Installation	Recessed

We reserve the right to make technical changes.

Should you have any enquiries, please consult an Actwell representative. Email: sales@actwelllighting.com.au
34 Mary Parade | Rydalmere NSW 2116 | Australia | T +61 2 9638 3333 | www.actwelllighting.com

TECHNICAL INFORMATION

Order Code:

AWS1515MTTC-(Colour Finish)-(Temperature)-(Beam Angle)-(Length)-(Dimming)

Example: AWS1515MTFC-AL-3K-120°-0.5-ND


Options:

Colour Finish	Temperature	Beam Angle	Length	Dimming
AL (Aluminium)	3K (3000K)	120	1.25m	ND (Non-Dim)
	4K (4000K)		Custom	

Dimensions Line Diagram:



Photometrics:

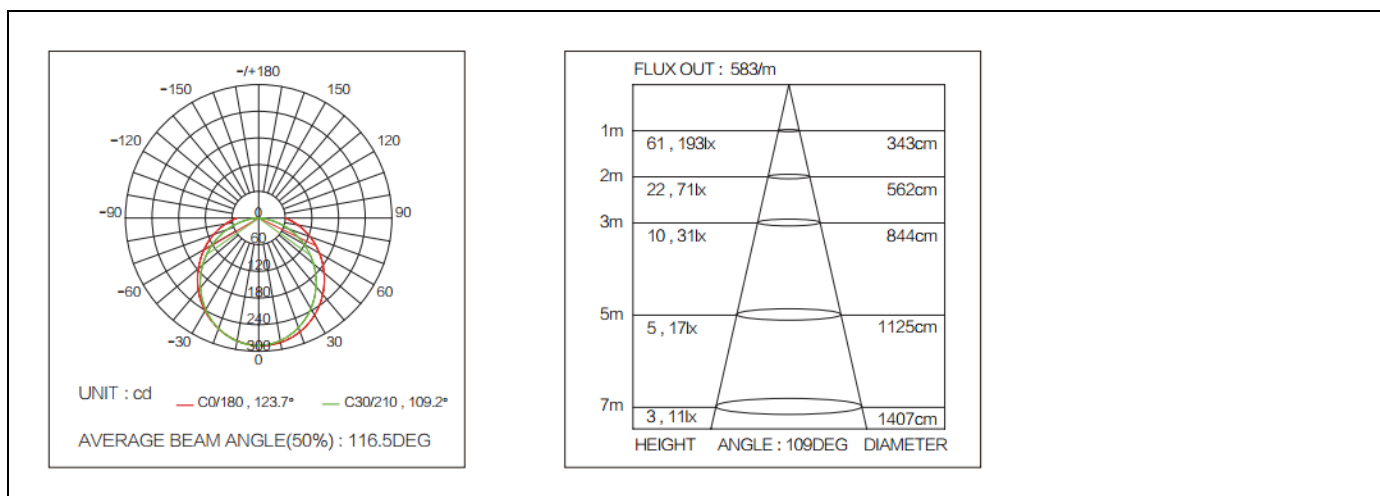

We reserve the right to make technical changes.

Should you have any enquiries, please consult an Actwell representative. Email: sales@actwelllighting.com.au

34 Mary Parade | Rydalmere NSW 2116 | Australia | T +61 2 9638 3333 | www.actwelllighting.com

TECHNICAL INFORMATION

Parts:



End cap x 4



Mounting clip x 8

Product Application Photos:

