

TECHNICAL INFORMATION

AW6317-1EW **Sovereign**



Wall Mounted
Fixed

Application Descriptions:

- Wall Mounted, Fixed
- Interior or Exterior Areas, Corrosion Resistant Applications
- Building Wall Perimeter, Stairs, Hallways, Entry Ways, Columns, Corridors and Pathway Applications

Product Name	SOVEREIGN
Description	Exterior, Stainless Steel, Cylindrical, Up and Down, Wall Mounted, LED Luminaire with Integral Driver
Material	Grade 304 Stainless Steel Body, Clear Tempered Glass Diffuser, Silicone Rubber Gasket
Dimensions	Diameter: 108mm; Height: 240mm; Projection: 120mm
LED Details	2x10W, Cree COB, 3000K, 45° Beam, CRI: 80, 1780lm,
Driver	Integral LED Driver
IP Rating	IP65
IK Rating	IK06
Installation	Wall Mounted

We reserve the right to make technical changes.

Should you have any enquiries, please consult an Actwell representative. Email: sales@actwelllighting.com.au
34 Mary Parade | Rydalmere NSW 2116 | Australia | T +61 2 9638 3333 | www.actwelllighting.com

TECHNICAL INFORMATION

Order Code:


AW6317-1EW-(Colour Finish)-(Temperature)-(Beam Angle)-(Dimming)

Example: AW6317-1EW-SS-3K-ND


Options:

Colour Finish	Temperature	Beam Angle	Dimming
SS (Stainless Steel)	3K (3000K)	45°	ND (Non-Dim)

Dimensions Line Diagram:

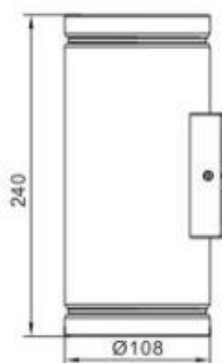

Photometrics:

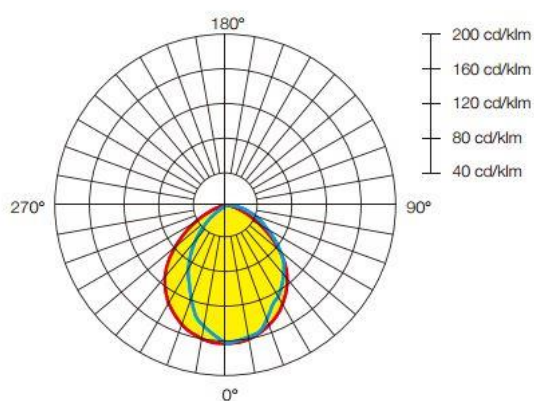

Output lumens: 115.7 lm

1m	26.87, 68.95 lx	230.24 cm
2m	6.718, 17.24 lx	460.49 cm
3m	2.986, 7.661 lx	690.73 cm
4m	1.679, 4.309 lx	920.97 cm
5m	1.075, 2.758 lx	1151.22 cm

Distance Average illuminanc Diameter

We reserve the right to make technical changes.

Should you have any enquiries, please consult an Actwell representative. Email: sales@actwelllighting.com.au

34 Mary Parade | Rydalmere NSW 2116 | Australia | T +61 2 9638 3333 | www.actwelllighting.com

TECHNICAL INFORMATION

Product Application Photo:

