## **TECHNICAL INFORMATION**



## **AW6322EW Eaton**





#### **Application Descriptions:**

- Wall Mounted, Fixed
- Interior and Exterior Areas
- Building Wall Perimeters, Stairs, Walkways, Entry Ways, Corridors and Pathway Applications

<b>Product Name</b>	EATON		
Description	Exterior, High Powered, Cylindrical, Up and Down, Wall Mounted, LED Luminaire with Integral Driver		
Material	Die Cast Aluminium Body & Frame with Anti-Ageing Powder coat and Pre-treated for External Use, PC Silver Trim, Clear Tempered Glass Cover		
Dimensions	Diameter: 110mm; Height: 175mm; Projection: 131mm		
<b>LED Details</b>	2x10W, Cree COB, 3000K or 4000K available, 38° Beam, 1400lm		
Driver	Integral LED Driver		
IP Rating	IP65		
IK Rating	IK08		
Installation	Surface Mounted		

## **TECHNICAL INFORMATION**



## **Order Code:**


## AW6322EW-(Colour Finish)-(Temperature)-(Beam Angle)-(Dimming)

Example: AW6322EW-BK-3K-82°-ND


## **Options:**

Colour Finish	Temperature	Beam Angle	Dimming
BK (Black)	3K (3000K)	82°	ND (Non-Dim)
	4K (4000K)		

#### **Dimensions Line Diagram:**

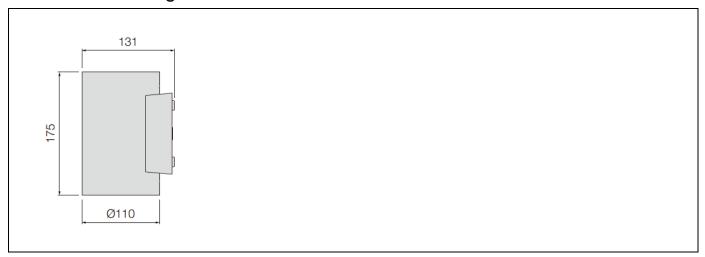

#### **Photometrics:**

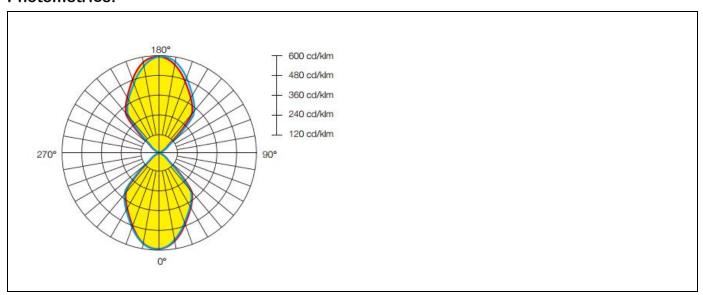



# **TECHNICAL INFORMATION**

# **Product Application Photo:**

