

TECHNICAL INFORMATION

AW414IU Octavia 26



Inground Up
Fixed

Application Descriptions:

- Inground, Fixed
- Exterior Areas, Landscaping
- Inground Pathway Lighting, Building Perimeters, Foliage/Tree Uplighter
Sculpture/Column Uplighter

Product Name	OCTAVIA 26
Description	Stainless Steel, Low Height, Circular Integral Driver, Inground LED Uplighter
Material	Stainless Steel 304 Grade Faceplate, Aluminium Body, Clear Strengthened Tempered Glass Diffuser Rated for 20kN Impact Force, Stainless Steel Screws
Dimensions	Diameter: 200mm; Height: 248mm; Cut Out: 190mm
LED Details	26W Cree XP SMD, 3000K available, Beam Angle: 36° 1360lm
Driver	Integral Driver
IP Rating	IP67
IK Rating	IK10
Installation	Inground

We reserve the right to make technical changes.

Should you have any enquiries, please consult an Actwell representative. Email: sales@actwelllighting.com.au
34 Mary Parade | Rydalmere NSW 2116 | Australia | T +61 2 9638 3333 | www.actwelllighting.com

TECHNICAL INFORMATION

Order Code:


AW414IU-(Colour Finish)-(Temperature)-(Beam Angle)-(Dimming)

Example: AW414IU-ST-3K-36°-ND


Options:

Colour Finish	Temperature	Beam Angle	Dimming
ST (S. Steel)	3K (3000K)	36°	ND (Non-Dim)

Dimensions Line Diagram:

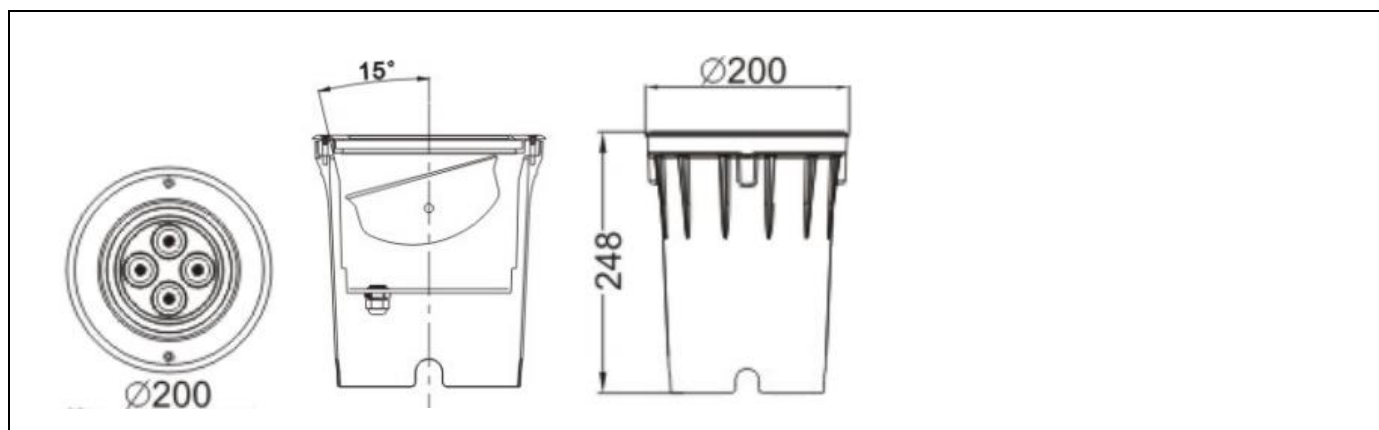

Photometrics:

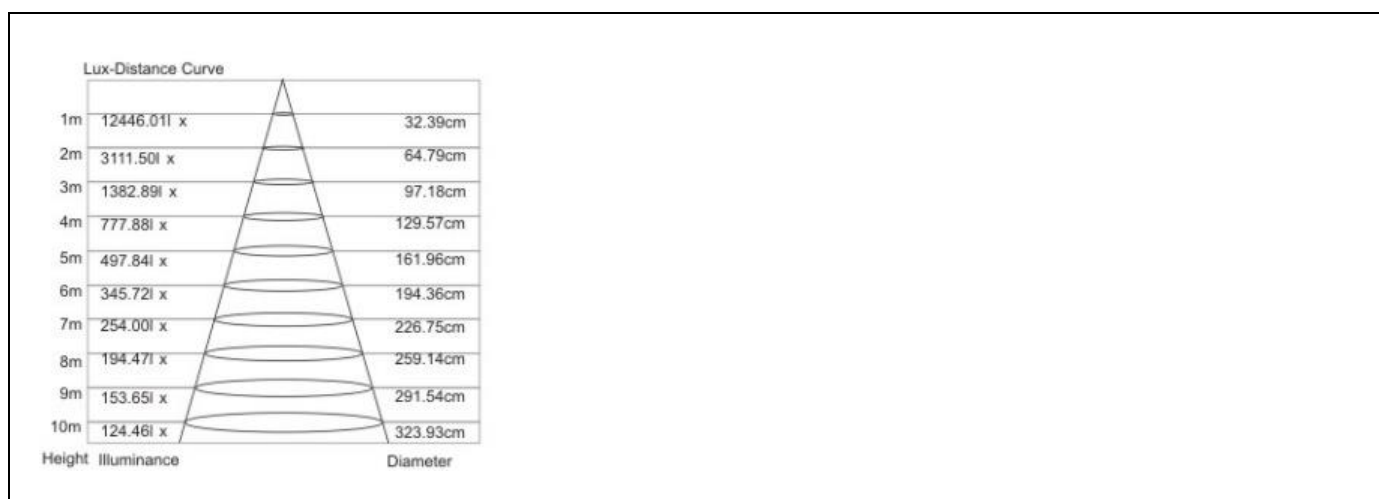

We reserve the right to make technical changes.

Should you have any enquiries, please consult an Actwell representative. Email: sales@actwelllighting.com.au

34 Mary Parade | Rydalmere NSW 2116 | Australia | T +61 2 9638 3333 | www.actwelllighting.com

TECHNICAL INFORMATION

Product Application Photo:

