

TECHNICAL INFORMATION

AW821-1CO Midnite Optic 20



Surface Mounted
Fixed

Application Descriptions:

- Surface Mounted, Fixed
- Internal and External Areas, Weatherproof and High Dust / Vandal Resistant Applications
- Balconies, Residential Living, Wet Areas, Public Amenities, Corridors, Awnings, Walkways, Waste Room Applications

Product Name	MIDNITE OPTIC 20
Description	Circular Ceiling Mounted Low Profile, Anti-Glare, Weatherproof, Vandal & UV Resistant LED Luminaire
Material	Die Cast Aluminium Trim and Body, Powder Coated for External Applications, Die Cast Aluminium, Twist Lock Base, UV Resistant Polycarbonate Opal Diffuser, Silicon Water Gaskets
Dimensions	Diameter: 300mm; Height: 66mm
LED Details	20W, Osram SMD2835, 3000K or 4000K available, 150° Beam, CRI: 80, 1350lms
Driver	Integral LED Driver
IP Rating	IP65
IK Rating	IK09
Installation	Surface Mounted

We reserve the right to make technical changes.

Should you have any enquiries, please consult an Actwell representative. Email: sales@actwelllighting.com.au
34 Mary Parade | Rydalmere NSW 2116 | Australia | T +61 2 9638 3333 | www.actwelllighting.com

TECHNICAL INFORMATION

Order Code:


AW821-1CO-(Colour Finish)-(Temperature)-(Beam Angle)-(Dimming)

Example: AW821-1CO-WH-3K-150°-ND


Options:

Colour Finish	Temperature	Beam Angle	Dimming
WH (WH)	3K (3000K)	150°	ND (Non-Dim)
BK (Black)	4K (4000K)		

Dimensions Line Diagram:

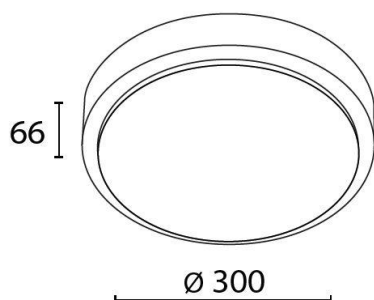

Photometrics:

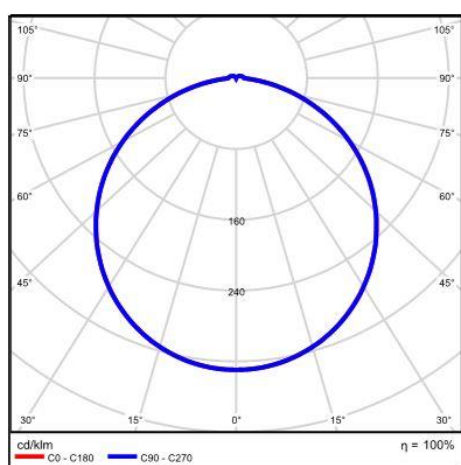

We reserve the right to make technical changes.

Should you have any enquiries, please consult an Actwell representative. Email: sales@actwelllighting.com.au

34 Mary Parade | Rydalmere NSW 2116 | Australia | T +61 2 9638 3333 | www.actwelllighting.com