TECHNICAL INFORMATION



AW5050MTFC Seamless





Application Descriptions:

- Surface Mounted, Fixed
- Internal Areas
- Kitchen and Bathroom Joinery, Alcoves, Skirting, Above and Below Cabinetry, Handrail, Under Bench and Wardrobe Linear Applications

Product Name	SEAMLESS
Description	Cabinetry or Alcove Linear Extrusion, Utilising PCB LED Technology for Superior Durability, Frosted Acrylic Diffuser, 24V, Available with Aluminium Mounting Clips, Custom Cut to Length
Material	Extruded Pure Aluminium Channel, Frosted Acrylic Diffuser, Aluminium Mounting Clips
Dimensions	Width: 17 mm; Height: 11mm; Cut Out: 19mm x 15mm
LED Details	14.4W/m Epistar SMD5050, 3000K, 4000K or RGB (10W/m) available, Beam Angle: 120°, 720lm/m
Driver	Remote 24V
IP Rating	IP44
IK Rating	IK03
Installation	Surface Mounted

TECHNICAL INFORMATION



Order Code:


<u>AW5050MTFC-(Colour Finish)-(Temp</u>erature)-(Beam Angle)-(Length)-(Dimming)

Example: AW5050MTFC-AL-3K-120°-0.5-ND


Options:

Colour Finish	Temperature	Beam Angle	Length	Dimming
AL (Aluminium)	3K (3000K)	120	0.5m	ND (Non-Dim)
	4K (4000K)		1m	
	RGB		1.5m	
			2.0m	
			Custom	

Dimensions Line Diagram:

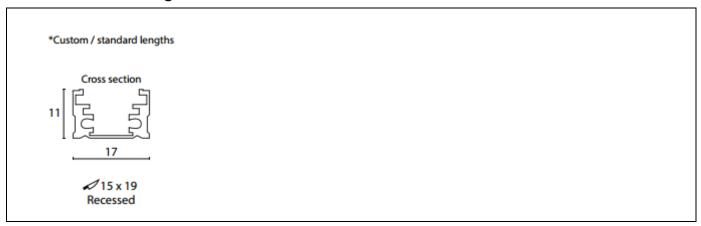

Photometrics:

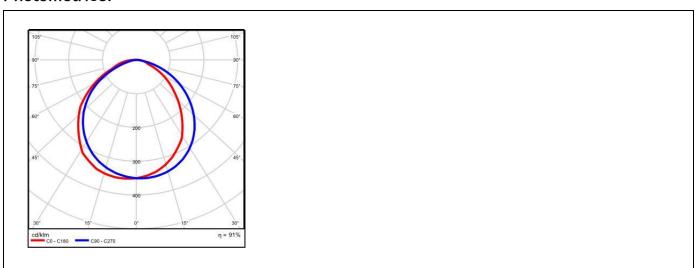

TECHNICAL INFORMATION



