

TECHNICAL INFORMATION

AW5050IPC Immersion



Application Descriptions:

- Surface Mounted, Fixed
- Internal and External Areas, Linear Lighting Applications
- Landscaping, Exterior Building Façades, Soffits or Alcoves, Cabinetry, Under seating, Wall Washing Applications

Product Name	IMMERSION
Description	Slim Design, Resin Coated, UV Protected, IP67 Weatherproof, 24V, Flexible Linear LED Tape
Material	Resin Coating, SMD LED Tape, Silicon Clip Holders, Silicon Ingress Protection End Caps
Dimensions	Width: 26mm; Height: 8mm
LED Details	4.8 or 14.4Watts/m, Samsung SMD 5050 LED, 400 or 1200 lm/m
Driver	Remote Driver
IP Rating	67
IK Rating	02
Installation	Surface Mounted

We reserve the right to make technical changes.

Should you have any enquiries, please consult an Actwell representative. Email: sales@actwelllighting.com.au
 34 Mary Parade | Rydalmere NSW 2116 | Australia | T +61 2 9638 3333 | www.actwelllighting.com

TECHNICAL INFORMATION

Order Code:


AW5050IPC-(Lighting Colour)- (Wattage)-(Length)-(Dimming)

Example: AW5050IPC-3000K-14.4W-15.0-ND


Options:

Lighting Colour	Wattage	Length	Dimming
3000K	4.8W	5000mm	ND (Non-Dim)
4000K	14.4W		11 (1-10V Dim)
RGB			DD (Dali Dim)
			DM (DMX)

Dimensions:

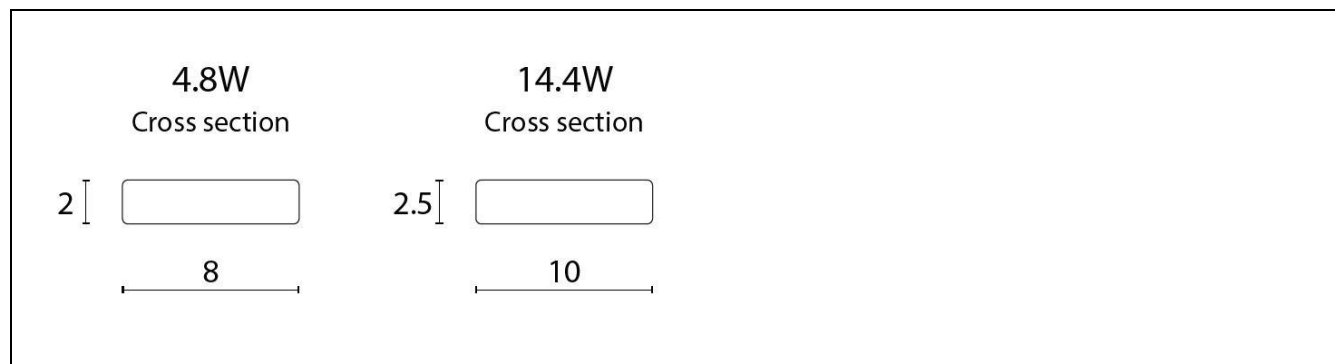

Photometrics:

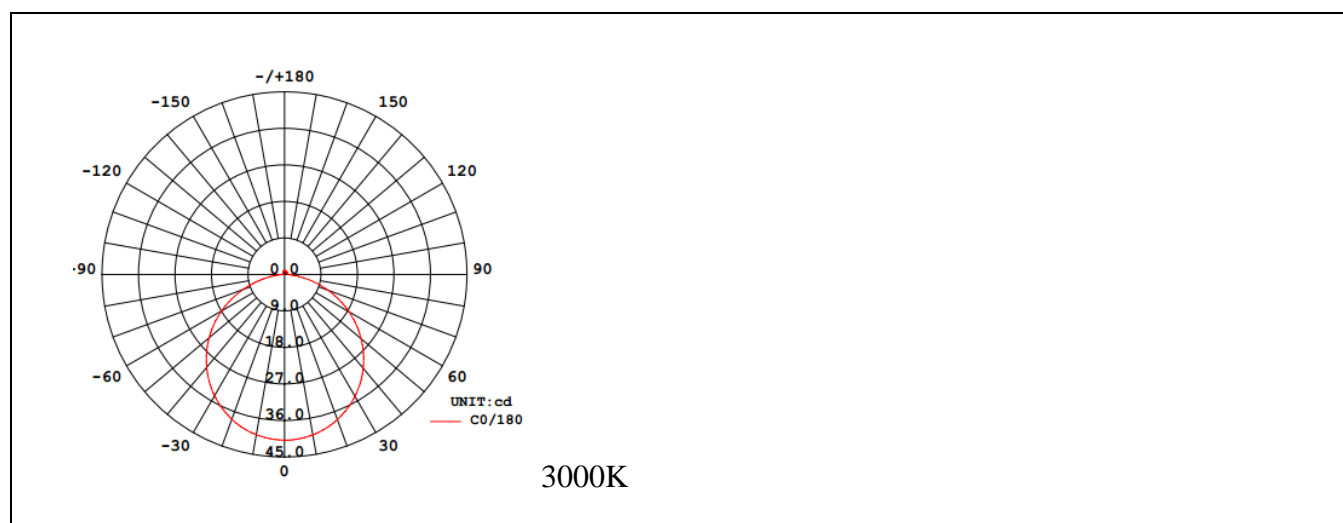

We reserve the right to make technical changes.

Should you have any enquiries, please consult an Actwell representative. Email: sales@actwelllighting.com.au

34 Mary Parade | Rydalmere NSW 2116 | Australia | T +61 2 9638 3333 | www.actwelllighting.com