

## TECHNICAL INFORMATION

### AW12RD **Iconic 12**



Recessed  
Adjustable

#### Application Descriptions:

- Recessed, Adjustable
- Internal Areas, Long Operational Hour Applications
- Commercial Offices, Universities, Retail and Hospitality Applications

Product Name	<b>ICONIC 12</b>
Description	3rd Generation, Robust Design, Custom Deep Baffle, Adjustable Recessed LED Downlight
Material	Powdercoated Die Cast Aluminium Trim, Custom Engineered Parabolic Reflector, PC Clear Diffuser
Dimensions	Diameter: 93mm; Height: 87mm; Cut Out: 80mm
LED Details	13.5W Bridgelux V10, 3000K or 4000K available, CRI: 85, Beam Angle: 50°, 1200lm
Driver	500mA LED Driver
IP Rating	IP20
IK Rating	IK04
Installation	Recessed

We reserve the right to make technical changes.

Should you have any enquiries, please consult an Actwell representative. Email: [sales@actwelllighting.com.au](mailto:sales@actwelllighting.com.au)  
34 Mary Parade | Rydalmere NSW 2116 | Australia | T +61 2 9638 3333 | [www.actwelllighting.com](http://www.actwelllighting.com)

## TECHNICAL INFORMATION

### Order Code:


AW12RD-(Colour Finish)-(Temperature)-(Beam Angle)-(Dimming)

Example: AW12RD-WH-3K-50°-ND


### Options:

Colour Finish	Temperature	Beam Angle	Dimming
WH (White)	3K (3000K)	50°	ND (Non-Dim)
BK (Black)	4K (4000K)		PH (Phase)
SL (Silver)			11 (1-10V)
			DD (DALI)

### Dimensions Line Diagram:

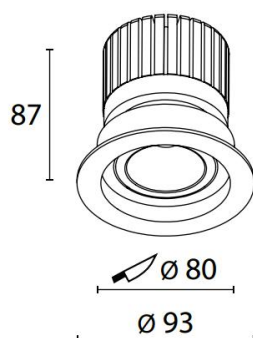

### Photometrics:

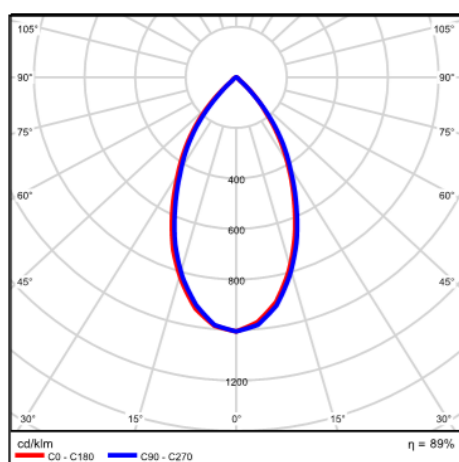

We reserve the right to make technical changes.

Should you have any enquiries, please consult an Actwell representative. Email: [sales@actwelllighting.com.au](mailto:sales@actwelllighting.com.au)

34 Mary Parade | Rydalmere NSW 2116 | Australia | T +61 2 9638 3333 | [www.actwelllighting.com](http://www.actwelllighting.com)