## **TECHNICAL INFORMATION**



## **AW38RD Ecoflare**





Recessed Adjustable

#### **Application Descriptions:**

- Recessed, Adjustable
- Internal Areas, General Ceiling Heights
- Residential Living, Aged Care Facilities, Retail and Hospitality Applications

<b>Product Name</b>	ECOFLARE		
Description	Low Profile, Anti Glare, Patented Heat Sink for Rapid Heat Dissipation, Adjustable, Recessed, LED Downlight		
Material	Aluminium Trim and Body, Parabolic Reflector, Center Frosted PC Lens Diffuser, Custom Engineered Heat Sink		
Dimensions	Diameter: 90mm; Height: 47mm; Cut Out: 82mm		
LED Details	10W Honglitronic LM002, 3000K or 4000K available, CRI: 80, Beam Angle: 60°, 870lm		
Driver	225mA LED Driver		
IP Rating	IP20		
IK Rating	IK04		
Installation	Recessed		

## **TECHNICAL INFORMATION**



## **Order Code:**


AW38RD-(Colour Finish)-(Temperature)-(Beam Angle)-(Dimming)

Example: AW38RD-WH-3K-60°-ND


# **Options:**

Colour Finish	Temperature	Beam Angle	Dimming
WH (White)	3K (3000K)	60°	ND (Non-Dim)
	4K (4000K)		PH (Phase)
			11 (1-10V)
			DD (DALI)

#### **Dimensions Line Diagram:**

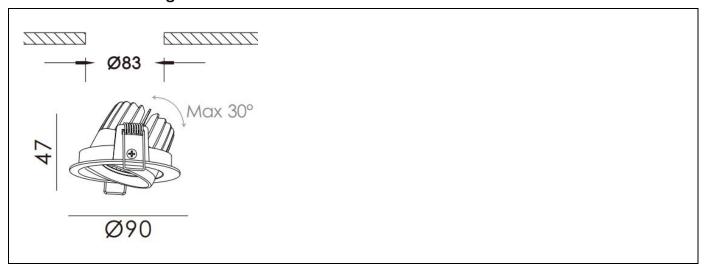

#### **Photometrics:**

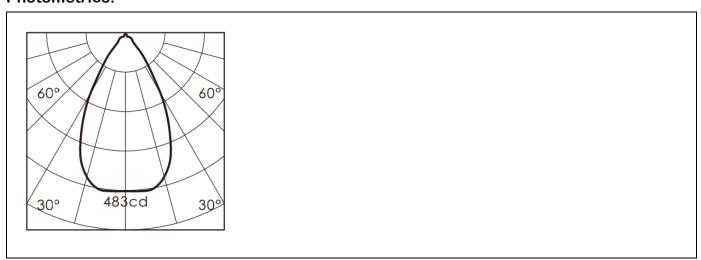

# **TECHNICAL INFORMATION**



# **Product Application Photos:**

