TECHNICAL INFORMATION



AW6282RD Dantez 40





Application Descriptions:

- Recessed, Fixed
- Internal Areas, High Level Ceiling Heights, Extensive Degree Beam Options
- Retail, Shopping Malls, Hospitality, Aged Care Facilities, Educational and Medical Buildings, Halls and Auditoriums, Commercial Office Applications

Product Name	DANTEZ 40
Description	High Output, Controlled Degree Beam Options, Anti
	Glare Deep Baffle, Fixed, Recessed LED Luminaire
Material	Powder Coated Die Cast Aluminium Trim and Body,
	Clear Tempered Glass, Parabolic Reflector
Dimensions	Diameter: 150mm; Height: 152mm; Cut Out: 140mm
LED Details	40W Sharp COB, 3000K or 4000K available,
	CRI: 85, Beam Angle: 15°, 24°, 36°, 60°, 4000lm
Driver	1050mA LED Driver
IP Rating	IP20
IK Rating	IK03
Installation	Recessed

TECHNICAL INFORMATION




Order Code:

AW6282RD-(Colour Finish)-(Temperature)-(Beam Angle)-(Dimming) Example: AW6282RD-WH-3K-60°-ND

Options:

Colour Finish	Temperature	Beam Angle	Dimming
WH (White)	3K (3000K)	15°	ND (Non-Dim)
BK (Black)	4K (4000K)	24 °	PH (Phase)
		36°	11 (1-10V)
		60°	DD (DALI)

Dimensions Line Diagram:

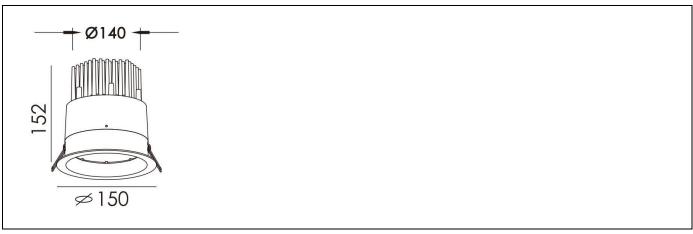

Photometrics:

Emax(Ix)	Em(Ix)	D(m)	h(m)	HANK	Emax(lx)	Em(lx)	D(m)	h(m)	HAM
24°				XMMX	15°				
4148	1037	0.8	2	600	7118	1780	0.6	2	00)
1844	645	1.2	3		3164	1107	0.9	3	$\times/$ $\parallel \setminus \times \mid$
1037	467	1.6	4	VAIITV	1780	801	1.2	4	1 THY V
664	365	2.0	5	1/59201	1140	627	1.5	5	0° 28594cd 309
461	300	2.4	6	30° 16593cd 309	791	514	1.8	6	0° 28594cd 309
Emax(lx)	Em(lx)	D(m)	h(m)	MAN	Emax(lx)	Em(lx)	D(m)	h(m)	HAN
60°				XXXX	36°				XXXX
1100	275	2.0	2	600	2428	607	1.0	2	00 600
489	171	2.9	3		1079	378	1.6	3	\vee \square
275	124	3.9	4	VYYV	607	273	2.1	4	MHY
176	97	4.9	5		389	214	2.6	5	27452
122	79	5.9	6	30° 4410cd 30°	270	176	3.1	6	0° 9742cd 30°

TECHNICAL INFORMATION



Product Application Photos:





