

TECHNICAL INFORMATION

AW609EW Ovel



Ceiling or Wall Mounted
Fixed

Application Descriptions:

- Surface Mounted, Fixed
- Interior or Exterior Areas, High IP or IK Requirement Applications
- Balcony, Awnings, Building Wall Perimeters, Walkways, Carpark, Stairwells, Public Amenities, Shelters and Warehouse Applications

Product Name	OVEL
Description	Exterior, Vandal Resistant, Low Profile, Anti-Glare, Wall Mounted LED Luminaire with Integral Driver
Material	Die Cast Aluminium, Powder coated and Pre-treated Body & Frame for Exterior Use, Toughened, Silicone Rubber Gasket, Polycarbonate Diffuser, Allen Head Screws
Dimensions	Height: 147mm; Width: 270mm; Projection: 83mm
LED Details	20W, Cree SMD2835, 3000K or 4000K available, 120° Beam, 1300lms
Driver	Integral LED Driver
IP Rating	IP65
IK Rating	IK09
Installation	Surface Mounted

We reserve the right to make technical changes.

Should you have any enquiries, please consult an Actwell representative. Email: sales@actwelllighting.com.au
34 Mary Parade | Rydalmere NSW 2116 | Australia | T +61 2 9638 3333 | www.actwelllighting.com

TECHNICAL INFORMATION

Order Code:


AW609EW-(Colour Finish)-(Temperature)-(Beam Angle)-(Dimming)

Example: AW609EW-BK-3K-ND-120°


Options:

Colour Finish	Temperature	Beam Angle	Dimming
BK (Black)	3K (3000K)	120°	ND (Non-Dim)
GP (Graphite)	4K (4000K)		

Dimensions Line Diagram:

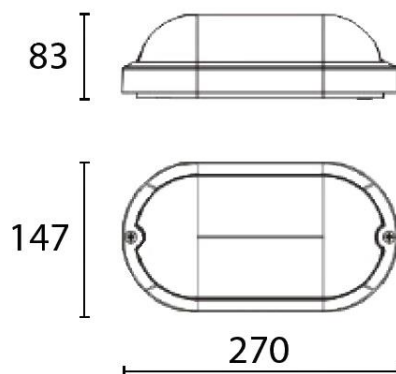

Photometrics:

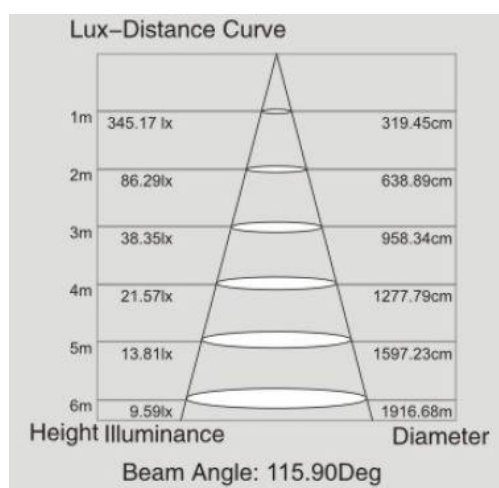

We reserve the right to make technical changes.

Should you have any enquiries, please consult an Actwell representative. Email: sales@actwelllighting.com.au

34 Mary Parade | Rydalmere NSW 2116 | Australia | T +61 2 9638 3333 | www.actwelllighting.com