## **TECHNICAL INFORMATION**



## AW576SD Eliza 12





## **Application Descriptions:**

- Surface Mounted, Fixed
- Interior and Exterior Areas, Wet Area Applications
- Balconies, Foyers, Building Eaves, Common Area Walkways, Carparks, Public Amenities, Lift Areas, Retail and Hospitality, Educational and Medical Building Applications

<b>Product Name</b>	ELIZA 12		
Description	Cylindrical Ceiling Mounted Weatherproof, Vandal Resistant LED Luminaire		
Material	Die Cast Aluminium Base, Aluminium Extruded Body Pre-treated with Anti-Ageing Electrostatic Coating, Tempered Clear Glass Diffuser		
Dimensions	Diameter: 126mm; Height: 135mm		
<b>LED Details</b>	12W, Cree COB, 3000K or 4200K available, 80° Beam, 1040lm		
Driver	Integral LED Driver		
IP Rating	IP65		
IK Rating	IK08		
Installation	Surface Mounted		

## **TECHNICAL INFORMATION**



# **Order Code:**


## AW576SD-(Colour Finish)-(Temperature)-(Beam Angle)-(Dimming)

Example: AW576SD-BK-3K-80°-ND


# **Options:**

Colour	Temperature	Beam Angle	Dimming
BK (Black)	3K (3000K)	80°	ND (Non-Dim)
	4.2K (4200K)		

## **Dimensions Line Diagram:**

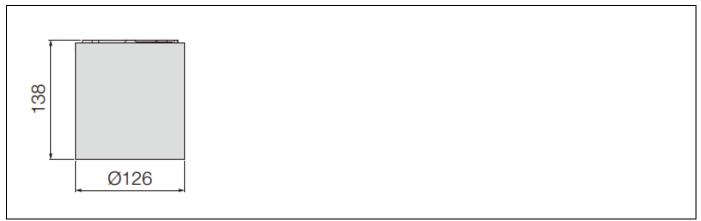

#### **Photometrics:**

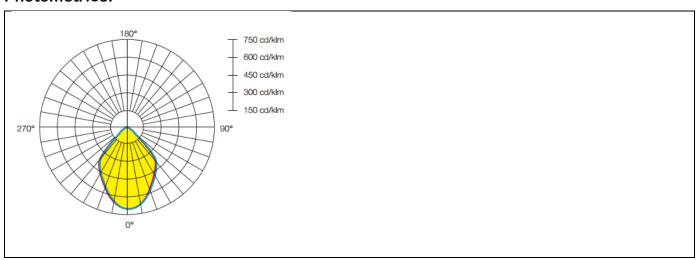





# **Product Application Photo:**

