

## TECHNICAL INFORMATION

### AW44RD Ascent S



Recessed  
Adjustable

#### Application Descriptions:

- Recessed, Adjustable
- Interior Areas, Deep Baffle Low Glare Applications
- Residential Living, Corridors, Retail and Hospitality Applications

Product Name	<b>ASCENT S</b>
Description	Square, Deep Baffle, Patented Heat Sink for Rapid Heat Dissipation, Adjustable, Recessed, LED Downlight
Material	Aluminium Trim and Body, Parabolic Reflector, Frosted PC Lens Diffuser, Custom Engineered Heat Sink
Dimensions	Diameter: 90 X 90mm; Height: 77mm; Cut Out: 80 X 83mm
LED Details	10W Sharp Zenigata, 3000K or 4000K available, CRI: 80, Beam Angle: 36°, 900lm
Driver	225mA LED Driver
IP Rating	IP20
IK Rating	IK05
Installation	Recessed

We reserve the right to make technical changes.

Should you have any enquiries, please consult an Actwell representative. Email: [sales@actwelllighting.com.au](mailto:sales@actwelllighting.com.au)  
34 Mary Parade | Rydalmere NSW 2116 | Australia | T +61 2 9638 3333 | [www.actwelllighting.com](http://www.actwelllighting.com)

## TECHNICAL INFORMATION

### Order Code:


AW44RD-(Colour Finish)-(Temperature)-(Beam Angle)-(Dimming)

Example: AW44RD-WH-3K-36°-ND


### Options:

Colour Finish	Temperature	Beam Angle	Dimming
WH (White)	3K (3000K)	36°	ND (Non-Dim)
	4K (4000K)		PH (Phase)
			11 (1-10V)
			DD (DALI)

### Dimensions Line Diagram:

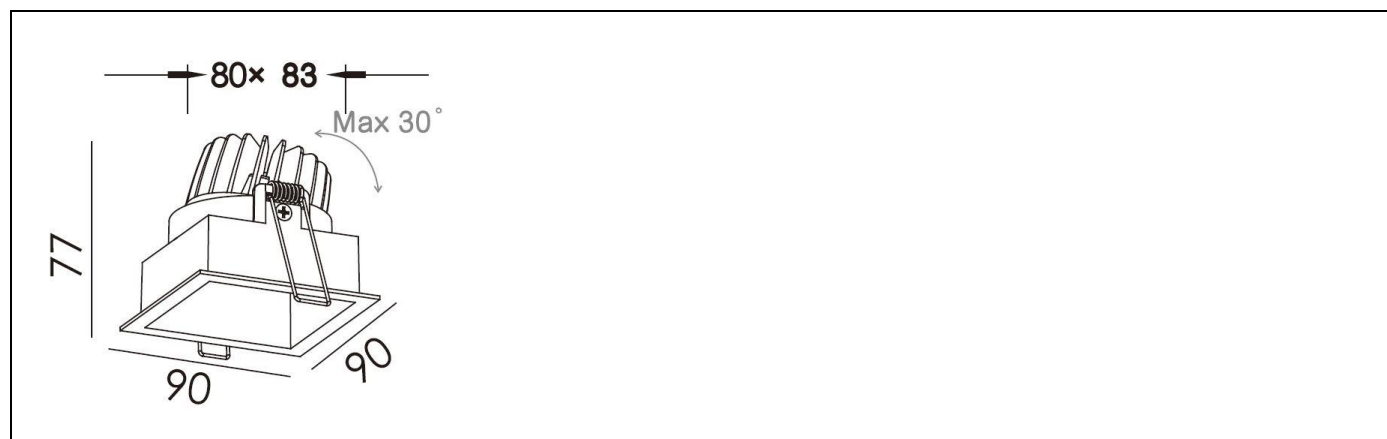

### Photometrics:

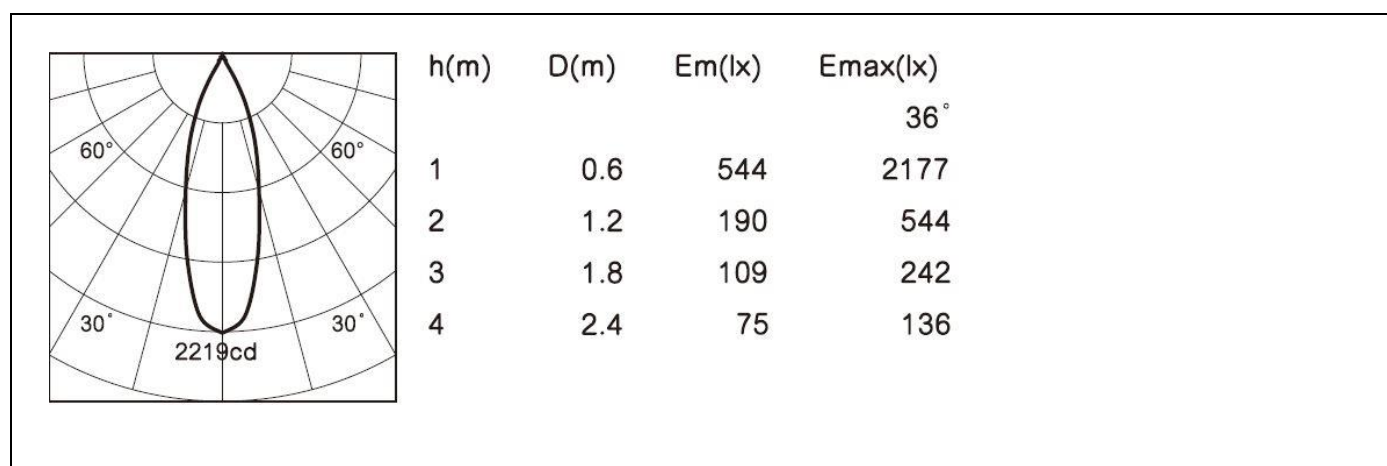

We reserve the right to make technical changes.

Should you have any enquiries, please consult an Actwell representative. Email: [sales@actwelllighting.com.au](mailto:sales@actwelllighting.com.au)

34 Mary Parade | Rydalmere NSW 2116 | Australia | T +61 2 9638 3333 | [www.actwelllighting.com](http://www.actwelllighting.com)