

TECHNICAL INFORMATION

AW6602RD Winter 15



Recessed
Fixed

Application Descriptions:

- Recessed, Fixed
- Interior, Exterior and Wet Area Locations, Low Ceiling Height Areas, Wide Coverage
- Kitchens, Bathrooms, Balconies, Patios, Awnings, Corridors, Commercial Offices, Retail Stores, Food Service Areas

Product Name	WINTER 15
Description	IP55 Weatherproof, Wide Beam, Low Profile, Fixed, Recessed LED Downlight, Superior SDCM Rating < 3
Material	Powdercoated Aluminium Trim and Body, Frosted Polycarbonate Diffuser, Silicon Rubber Gasket
Dimensions	Diameter: 135mm; Height: 69mm; Cut Out: 110mm
LED Details	15W Epistar COB, 3000K or 4000K available, CRI: 80, Beam Angle: 90°, 1500lm
Driver	350mA LED Driver
IP Rating	IP55
IK Rating	IK04
Installation	Recessed

We reserve the right to make technical changes.

Should you have any enquiries, please consult an Actwell representative. Email: sales@actwelllighting.com.au
34 Mary Parade | Rydalmere NSW 2116 | Australia | T +61 2 9638 3333 | www.actwelllighting.com

TECHNICAL INFORMATION

Order Code:


AW6602RD-(Colour Finish)-(Temperature)-(Beam Angle)-(Dimming)

Example: AW6602RD-WH-3K-90°-ND


Options:

Colour Finish	Temperature	Beam Angle	Dimming
WH (White)	3K (3000K)	90°	ND (Non-Dim)
	4K (4000K)		PH (Phase)
			11 (1-10v)
			DD (Dali)

Dimensions Line Diagram:

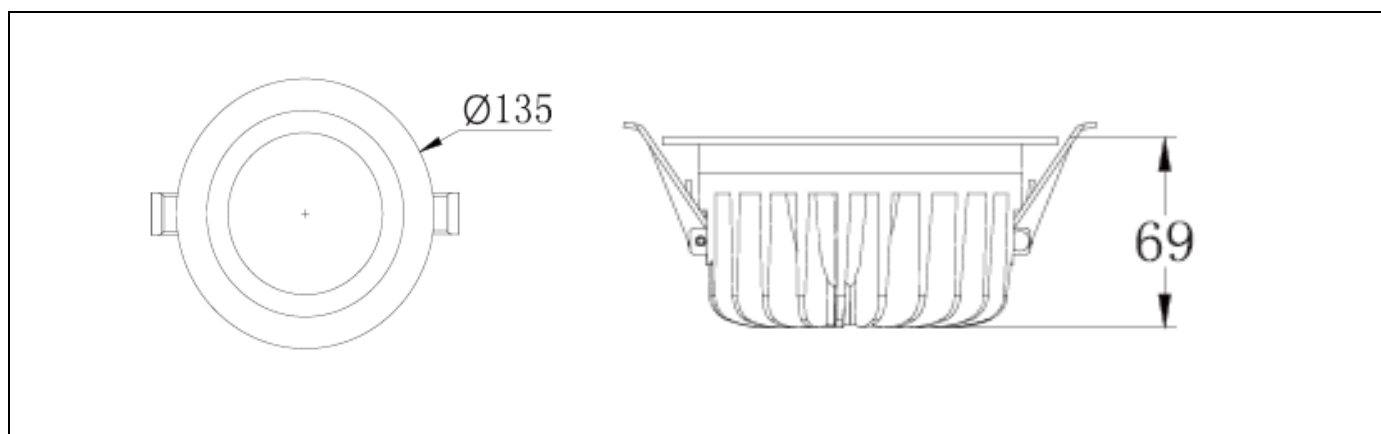

Photometrics:

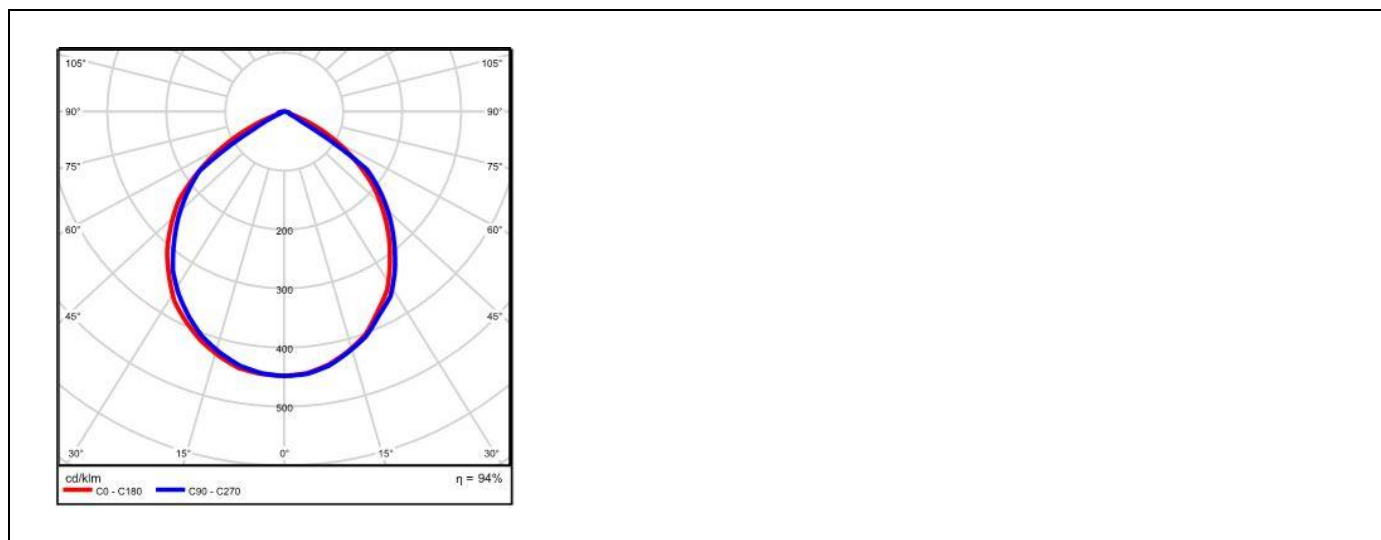

We reserve the right to make technical changes.

Should you have any enquiries, please consult an Actwell representative. Email: sales@actwelllighting.com.au

34 Mary Parade | Rydalmere NSW 2116 | Australia | T +61 2 9638 3333 | www.actwelllighting.com