
TECHNICAL INFORMATION



AW9907RD Skylight R30





Application Descriptions:

- Recessed, Fixed
- Internal Areas, Wide and Even Light Coverage, Low Ceiling Applications
- Residential Living, Commercial Offices, Education and Medical Buildings, Retail and Hospitality: Bedrooms and Living Rooms, Corridors, Reception and Work Desks, Kitchens, Lift Entries Applications

Product Name	SKYLIGHT R30
Description	Low Profile, Circular, Wide Distribution, Recessed, LED Luminaire, Utilising Patented Thin Film Transistor Technology
Material	Die Cast Aluminium Trim and Body, Powdercoated
	Matt Finish, Aluminium Heat Sink, Patented Thin Film
	Transistor, PMMA Opal Diffuser
Dimensions	Diameter: 300mm; Height: 19mm; Cut Out: 284mm
LED Details	30W Epistar SMD3528, 3000K or 4000K available,
	CRI: 80, Beam Angle: 120°, 2400lm
Driver	1000mA LED Driver
IP Rating	IP44
IK Rating	IK05
Installation	Recessed

TECHNICAL INFORMATION



Order Code:


AW9907RD-(Colour Finish)-(Temperature)-(Beam Angle)-(Dimming)

Example: AW9907RD-WH-3K-120°-ND


Options:

Colour Finish	Temperature	Beam Angle	Dimming
WH (White)	3K (3000K)	120°	ND (Non-Dim)
BK (Black)	4K (4000K)		PH (Phase)
			DD (DALI)

Dimensions Line Diagram:

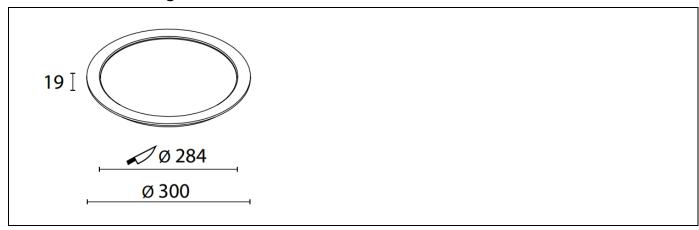

Photometrics:

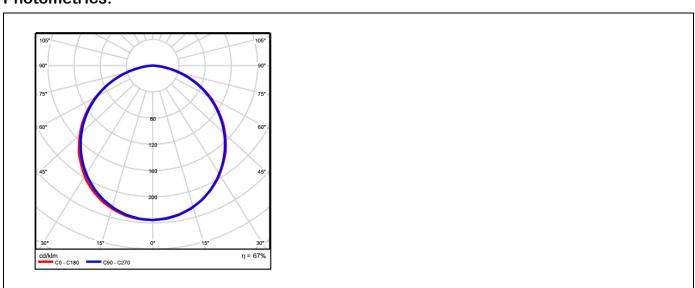





Product Application Photos:



