TECHNICAL INFORMATION



AW156BD Cavalier S





Application Descriptions:

- Floor Mounted, Fixed
- Interior and Exterior Areas, Landscaping
- Garden Beds, Pathway Lighters, Perimeter Lighting for Buildings,
 Carparks, Parks and Amenities, Landscaping and Foreshore Applications

Product Name	CAVALIER S	
Description	High Powered Downwards Dispersed Cylindrical LED Bollard	
Material	Die cast Aluminium Body, Powder Coated and Pre-Treated for Outdoor Use, PMMA Diffuser, Surface Anti-Age Spray Processed, Stainless Steel Screws	
Dimensions	Height: 1000 mm; Width: 168mm; Base-plate: 202mm	
LED Details	25W, Cree XBD, 3000K, 1500lms	
Driver	Integral Non-Dimmable Driver	
IP Rating	IP65	
IK Rating	IK08	
Installation	Floor Mounted	

TECHNICAL INFORMATION



Order Code:


<u>AW156BD-(Colour Finish)</u>-(Temperature)-(Dimming)

Example: AW156BD-SL-3K-ND


Options:

Colour Finish	Temperature	Dimming
SL (Silver)	3K (3000K)	ND (Non-Dim)

Dimensions Line Diagram:

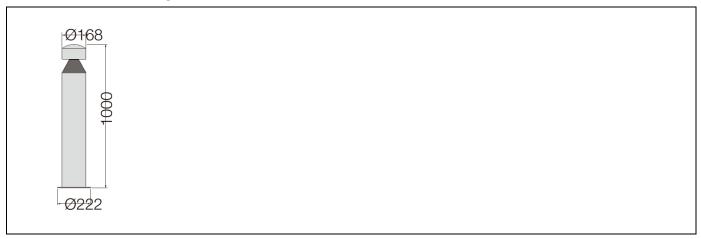

Photometrics:

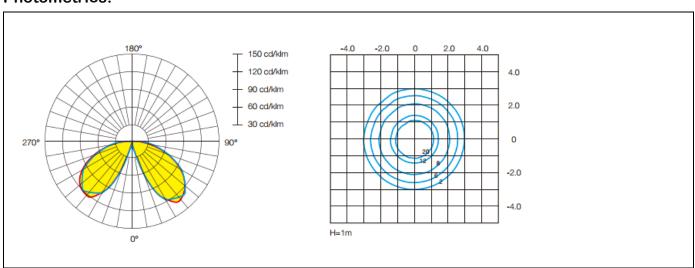





Product Application Photos:



