

## TECHNICAL INFORMATION

### AW821-2CO Midnite Optic 30



Surface Mounted  
Fixed

#### Application Descriptions:

- Surface Mounted, Fixed
- Internal and External Areas, Weatherproof and High Dust / Vandal Resistant Applications
- Balconies, Residential Living, Wet Areas, Public Amenities, Corridors, Awnings, Walkways, Waste Room Applications

Product Name	<b>MIDNITE OPTIC 30</b>
Description	Circular Ceiling Mounted Low Profile, Anti-Glare, Weatherproof, Vandal & UV Resistant LED Luminaire
Material	Die Cast Aluminium Trim and Body, Powder Coated for External Applications, Die Cast Aluminium, Twist Lock Base, UV Resistant Polycarbonate Opal Diffuser, Silicon Water Gaskets
Dimensions	Diameter: 300mm; Height: 66mm
LED Details	30W, Osram SMD2835, 3000K or 4000K available, 150° Beam, CRI: 80, 2200lms
Driver	Integral LED Driver
IP Rating	IP65
IK Rating	IK09
Installation	Surface Mounted

We reserve the right to make technical changes.

Should you have any enquiries, please consult an Actwell representative. Email: [sales@actwelllighting.com.au](mailto:sales@actwelllighting.com.au)  
34 Mary Parade | Rydalmere NSW 2116 | Australia | T +61 2 9638 3333 | [www.actwelllighting.com](http://www.actwelllighting.com)

## TECHNICAL INFORMATION

### Order Code:


AW821-2CO-(Colour Finish)-(Temperature)-(Beam Angle)-(Dimming)

Example: AW821-2CO-WH-3K-150°-ND


### Options:

Colour Finish	Temperature	Beam Angle	Dimming
WH (WH)	3K (3000K)	150°	ND (Non-Dim)
BK (Black)	4K (4000K)		

### Dimensions Line Diagram:

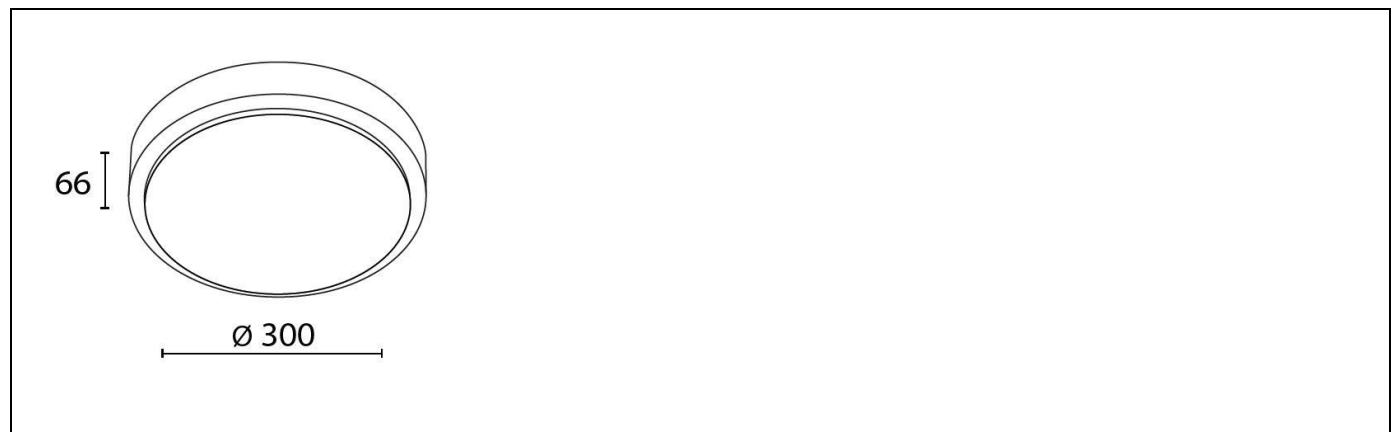

### Photometrics:

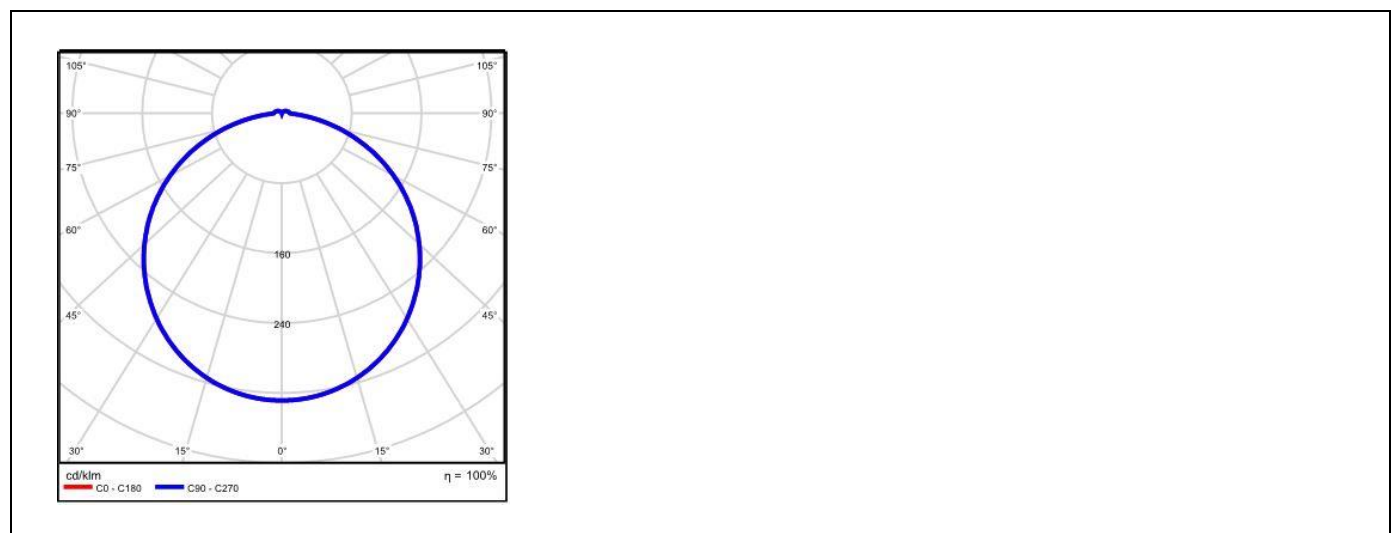

We reserve the right to make technical changes.

Should you have any enquiries, please consult an Actwell representative. Email: [sales@actwelllighting.com.au](mailto:sales@actwelllighting.com.au)

34 Mary Parade | Rydalmere NSW 2116 | Australia | T +61 2 9638 3333 | [www.actwelllighting.com](http://www.actwelllighting.com)