

## TECHNICAL INFORMATION

### AW68RD Fiore



Recessed  
Fixed

#### Application Descriptions:

- Recessed, Fixed
- Internal and External Areas, High Dust and Waterproofing Applications
- Awnings, Balconies, Patios, Bathrooms, Showers and Sauna Applications

Product Name	<b>FIORE</b>
Description	IP65 Water and Dust Protected, Low Profile, Fixed, Recessed LED Downlight
Material	Powdercoated Aluminium Body for Outdoor Applications, Parabolic Reflector, Shrouded Heat Sink, Water Proof Capping and Silicon Rubber Ring
Dimensions	Diameter: 80mm; Height: 50mm; Cut Out: 68mm
LED Details	5W Sharp COB, 3000K or 4000K available, CRI: 80, Beam Angle: 36°, 400lm
Driver	350mA LED Driver
IP Rating	IP65
IK Rating	IK05
Installation	Recessed

We reserve the right to make technical changes.

Should you have any enquiries, please consult an Actwell representative. Email: [sales@actwelllighting.com.au](mailto:sales@actwelllighting.com.au)  
34 Mary Parade | Rydalmere NSW 2116 | Australia | T +61 2 9638 3333 | [www.actwelllighting.com](http://www.actwelllighting.com)

## TECHNICAL INFORMATION

### Order Code:

**AW68RD-(Colour Finish)-(Temperature)-(Beam Angle)-(Dimming)**

**Example: AW68RD-WH-3K-36°-ND**


### Options:

Colour Finish	Temperature	Beam Angle	Dimming
WH (White)	3K (3000K)	36°	ND (Non-Dim)
BK (Black)	4K (4000K)		PH (Phase)
			11 (1-10V)
			DD (DALI)

### Dimensions Line Diagram:



### Photometrics:

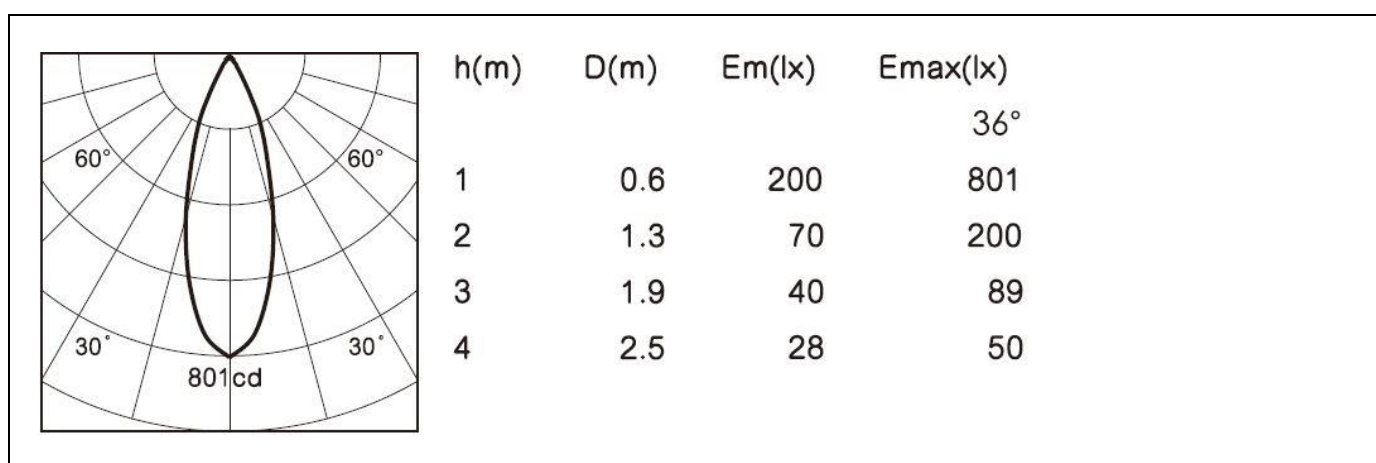

We reserve the right to make technical changes.

Should you have any enquiries, please consult an Actwell representative. Email: [sales@actwelllighting.com.au](mailto:sales@actwelllighting.com.au)

34 Mary Parade | Rydalmere NSW 2116 | Australia | T +61 2 9638 3333 | [www.actwelllighting.com](http://www.actwelllighting.com)