TECHNICAL INFORMATION



AW9906RD Skylight R15





Application Descriptions:

- Recessed, Fixed
- Internal Areas, Wide and Even Light Coverage, Low Ceiling Applications
- Residential Living, Commercial Offices, Education and Medical Buildings, Retail and Hospitality: Bedrooms and Living Rooms, Corridors, Reception and Work Desks, Kitchens, Lift Entries Applications

Product Name	SKYLIGHT R15
Description	Low Profile, Circular, Wide Distribution, Recessed, LED Luminaire, Utilising Patented Thin Film Transistor
Material	Technology Die Cast Aluminium Trim and Body, Powdercoated
	Matt Finish, Aluminium Heat Sink, Patented Thin Film Transistor, PMMA Opal Diffuser
Dimensions	Diameter: 240mm; Height: 19mm; Cut Out: 225mm
LED Details	15W Epistar SMD3528, 3000K or 4000K available, CRI: 80, Beam Angle: 120°, 1450lm
Driver	500mA LED Driver
IP Rating	IP44
IK Rating	IK05
Installation	Recessed

TECHNICAL INFORMATION



Order Code:


AW9906RD-(Colour Finish)-(Temperature)-(Beam Angle)-(Dimming)

Example: AW9906RD-WH-3K-120°-ND


Options:

Colour Finish	Temperature	Beam Angle	Dimming
WH (White)	3K (3000K)	120°	ND (Non-Dim)
BK (Black)	4K (4000K)		PH (Phase)
			DD (DALI)

Dimensions Line Diagram:

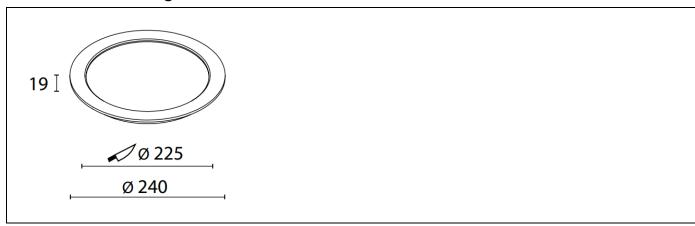

Photometrics:

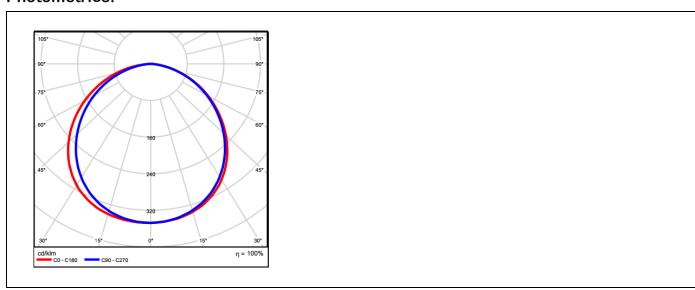

TECHNICAL INFORMATION



Product Application Photos:



