

TECHNICAL INFORMATION

AW5050MTTC Cornice



Surface Mounted
Adjustable

Application Descriptions:

- Surface Mounted, Adjustable
- Internal Areas, Linear Lighting Applications
- Ceiling Alcoves, Cabinetry, Wall Washing Applications

Product Name	CORNICE
Description	Adjustable Cornice Cabinetry or Alcove Linear Extrusion, Utilising PCB LED Technology for Superior Durability, Frosted Acrylic Diffuser, 12V, Available with Adjustable Foundation Bases, Custom Cut to Length
Material	Extruded Pure Aluminium Channel, Frosted Acrylic Diffuser, Aluminium Mounting Clips
Dimensions	Width: 14 mm; Height: Long 21mm Short 17mm
LED Details	14.4W/m Epistar SMD5050, 3000K or 4000K available, Beam Angle: 120°, 720lm/m
Driver	Remote 12V
IP Rating	IP44
IK Rating	IK03
Installation	Surface Mounted

We reserve the right to make technical changes.

Should you have any enquiries, please consult an Actwell representative. Email: sales@actwelllighting.com.au
34 Mary Parade | Rydalmere NSW 2116 | Australia | T +61 2 9638 3333 | www.actwelllighting.com

TECHNICAL INFORMATION

Order Code:


AW5050MTTC-(Colour Finish)-(Temperature)-(Beam Angle)-(Length)-(Dimming)

Example: AW5050MTTC-AL-3K-120°-0.5-ND


Options:

Colour Finish	Temperature	Beam Angle	Length	Dimming
AL (Aluminium)	3K (3000K)	120	0.5m	ND (Non-Dim)
	4K (4000K)		1m	
			Custom	

Dimensions Line Diagram:



Photometrics:

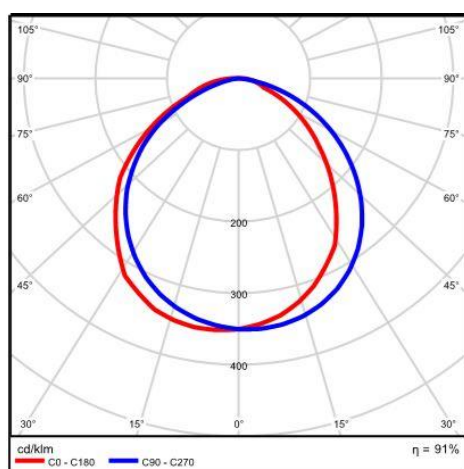

We reserve the right to make technical changes.

Should you have any enquiries, please consult an Actwell representative. Email: sales@actwelllighting.com.au

34 Mary Parade | Rydalmere NSW 2116 | Australia | T +61 2 9638 3333 | www.actwelllighting.com