

TECHNICAL INFORMATION

AW6316EW Firth



Wall Mounted
Fixed

Application Descriptions:

- Wall Mounted, Fixed
- Interior and Exterior Areas, Ambient Lighting
- Residential Living Bedroom and Living Rooms, Commercial Offices, Retail and Hospitality: Stairs, Hallways, Entry Ways, Corridors and Pathway Applications

Product Name	FIRTH
Description	Exterior, Cylindrical, One Directional, Wall Mounted, LED Luminaire with Integral Driver
Material	Die Cast Aluminium Body & Frame, Powder coated and Pre-treated for Outdoor Use, Frosted Glass Diffuser, Silicone Rubber Gasket
Dimensions	Height: 90mm; Diameter: 65mm; Projection: 95mm
LED Details	3W, Epistar SMD, 3000K, CRI: 80, 250lms
Driver	Integral LED Driver
IP Rating	IP54
IK Rating	IK04
Installation	Surface Mounted

We reserve the right to make technical changes.

Should you have any enquiries, please consult an Actwell representative. Email: sales@actwelllighting.com.au
34 Mary Parade | Rydalmere NSW 2116 | Australia | T +61 2 9638 3333 | www.actwelllighting.com

TECHNICAL INFORMATION

Order Code:


AW6316EW-(Colour Finish)-(Temperature)-(Beam Angle)-(Dimming)

Example: AW6316EW-BK-3K-60-ND


Options:

Colour Finish	Temperature	Beam Angle	Dimming
BK (Black)	3K (3000K)	60°	ND (Non-Dim)
GR (Grey)			

Dimensions Line Diagram:

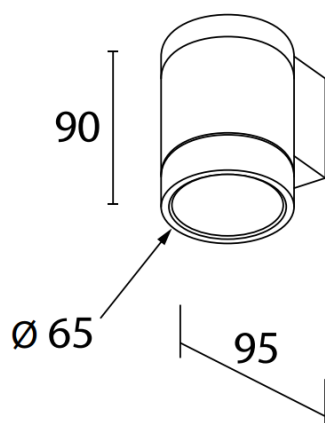

Photometrics:

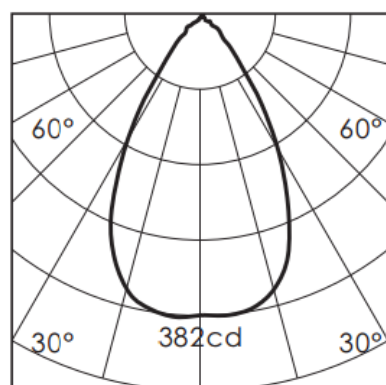

h(m)	D(m)	Em(lx)	Emax(lx)
			60°
1	1.2	95	378
2	2.4	33	95
3	3.6	19	42
4	4.9	13	24