

TECHNICAL INFORMATION

AW6217RD Prima C



Recessed
Fixed

Application Descriptions:

- Recessed, Fixed
- Interior and Exterior Areas, Wide Coverage Applications
- Undercover Awnings, Walkways, Corridors, Lobbies, Retail and Hospitality Commercial Offices, Educational and Medical Buildings, Aged Care Facility Applications

Product Name	PRIMA C
Description	Medium Beam, Frosted Diffuser, Custom Engineered Heat Sink, Fixed, Recessed LED Downlight
Material	Die Cast Aluminium Alloy, Electrostatic Powder-Coating, Parabolic Reflector, Frosted Glass Diffuser
Dimensions	Diameter: 150mm; Height: 123mm; Cut Out: 140mm
LED Details	20W Sharp COB, 3000K or 4000K available, CRI: 80, Beam Angle: 60°, 1900lm
Driver	500mA LED Driver
IP Rating	IP44
IK Rating	IK03
Installation	Recessed

We reserve the right to make technical changes.

Should you have any enquiries, please consult an Actwell representative. Email: sales@actwelllighting.com.au
34 Mary Parade | Rydalmere NSW 2116 | Australia | T +61 2 9638 3333 | www.actwelllighting.com

TECHNICAL INFORMATION

Order Code:


AW6217RD-(Colour Finish)-(Temperature)-(Beam Angle)-(Dimming)

Example: AW6217RD-WH-3K-60°-ND


Options:

Colour Finish	Temperature	Beam Angle	Dimming
WH (White)	3K (3000K)	60°	ND (Non-Dim)
GR (Grey)	4K (4000K)		PH (Phase)
BK (Black)			11 (1-10V)
			DD (DALI)

Dimensions Line Diagram:

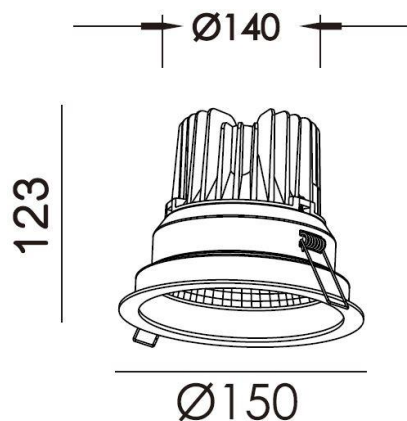

Photometrics:

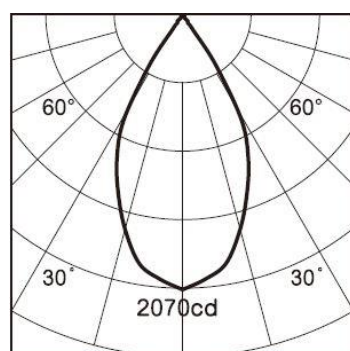

h(m)	D(m)	Em(lx)	Emax(lx)
			60°
1	1.1	932	2070
2	2.2	285	518
3	3.3	150	230
4	4.4	97	129
5	5.5	71	83