TECHNICAL INFORMATION



AW12BRD Iconic 12 IP





Recessed Fixed

Application Descriptions:

- Recessed, Fixed
- Internal or External Areas, Long Operational Hour Applications
- Commercial Offices, Universities, Retail and Hospitality, Outdoor Awning and Balcony Applications

Product Name	ICONIC 12 IP
Description	3rd Generation, IP54 Outdoor Use, Robust Design,
	Custom Deep Baffle, Fixed Recessed LED Downlight
Material	Powdercoated Die Cast Aluminium Trim, Custom
	Engineered Parabolic Reflector, PC Clear Diffuser
Dimensions	Diameter: 93mm; Height: 87mm; Cut Out: 80mm
LED Details	13.5W Bridgelux V10, 3000K or 4000K available,
	CRI: 85, Beam Angle: 50°, 1200lm
Driver	500mA LED Driver
IP Rating	IP54
IK Rating	IK04
Installation	Recessed

TECHNICAL INFORMATION



Order Code:


AW12BRD-(Colour Finish)-(Temperature)-(Beam Angle)-(Dimming)

Example: AW12BRD-WH-3K-50°-ND


Options:

Colour Finish	Temperature	Beam Angle	Dimming
WH (White)	3K (3000K)	50 °	ND (Non-Dim)
BK (Black)	4K (4000K)		PH (Phase)
SL (Silver)			11 (1-10V)
			DD (DALI)

Dimensions Line Diagram:

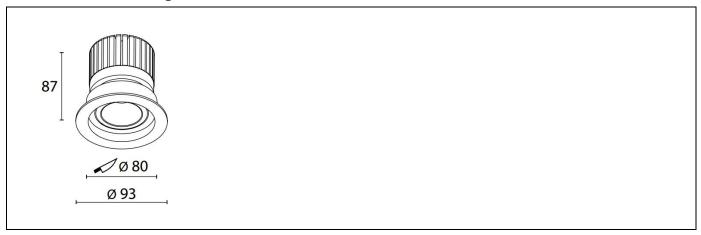

Photometrics:

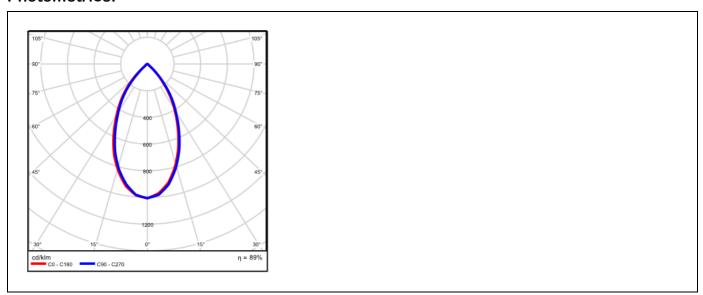

TECHNICAL INFORMATION



Product Application Photos:







